

Heavy Duty Slurry Pumps Type Ensival Moret EMW



Heavy Duty Slurry Pumps Type Ensival Moret EMW

The EMW pump range has been designed considering historic field experience, coupled with the latest in CFD (computational fluid dynamics) technologies and finite element analysis, to create the latest in slurry pumping technology. The pump range offers high hydraulic efficiencies for optimized wear life performance in difficult solids handling applications.

Main Applications

The EMW pump range has been designed to ensure trouble-free operation in the most difficult processes in the following industrial applications:

- Mining and mineral processing
- Aggregates (sand and gravel)
- Power (bottom ash, lime slurry for flue gas desulphurization (FGD))
- Food industry
- Wastewater
- Chemical slurries

Key Customer Benefits

Sulzer's EMW pumps offer high reliability and durability. The heavy-duty design combined with high performance make the pumps more reliable while significantly reducing the total cost of ownership. Key benefits include:

High durability

- Wide range of high-quality materials (metallic as well as rubber) ensures exceptional endurance against wear in all pumping applications for abrasive and/or corrosive liquids
- High durability due to great thickness of casing and impeller extends the lifetime of the pump bringing savings in spare parts consumption and total cost of ownership (TCO)

Maximum efficiency

- Optimized hydraulics ensure high efficiency and minimized wear in the largest operating range
- Internal clearance adjustments are easily and quickly realizable, which allows to obtain the best efficiency throughout the lifetime of the pump
- Low NPSH over the entire operating range avoiding cavitation of pumps

High reliability

- Heavy-duty bearings offer LB10 bearing life of more than 50 000 hours
- Only one bearing bracket per pump type, impermeable to water flushing IP 56

Minimized total cost of ownership (TCO)

- Low energy consumption due to high efficiency
- Low operational cost due to high reliability
- Easy and quick installation and maintenance
- Low spare parts cost due to high standardization between EMW-M and EMW-R

Heavy Duty Slurry Pumps Type Ensival Moret EMW




Operating data


50 Hz		60 Hz
up to 1 450 m ³ /h (EMW-R) up to 4 000 m ³ /h (EMW-M)	Capacities	up to 6 385 USgpm (EMW-R) up to 17 600 USgpm (EMW-M)
up to 55 m (EMW-R) up to 95 m (EMW-M)	Heads	up to 180 ft (EMW-R) up to 312 ft (EMW-M)
up to 14 bar (EMW-R) up to 16 bar (EMW-M)	Pressures	up to 203 psi (EMW-R) up to 232 psi (EMW-M)
up to 110°C	Temperatures	up to 230°F
up to 2 600 rpm (EMW-R) up to 3 000 rpm (EMW-M)	Maximum speed of rotation	up to 2 600 rpm (EMW-R) up to 3 000 rpm (EMW-M)

Performance ranges

EMW-M

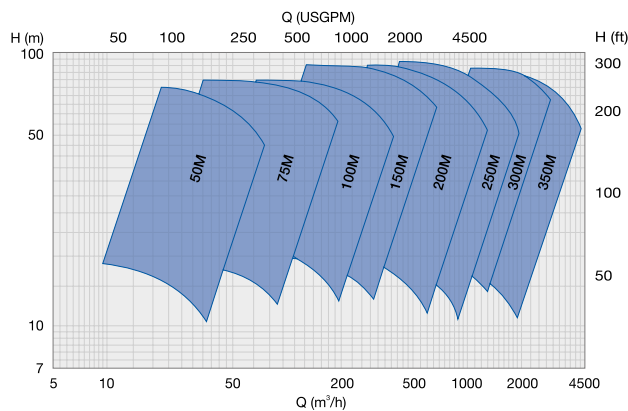

EMW-R

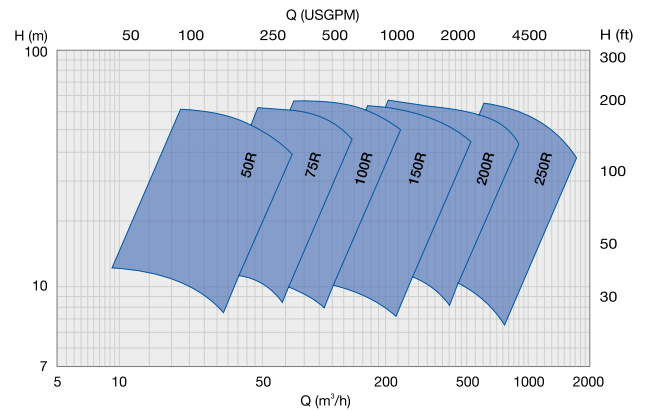

Superior Design Features Minimize Total Cost of Ownership

Common features

- 1 Paired single row tapered roller bearings**
 - Handle both high radial and axial loads
- 2 Standard bearing protection by labyrinth ring**
 - Impermeable to water-flushing
- 3 New impeller mounting system**
 - Easy installation and removal of the impeller while providing strong and reliable power transmission
- 4 Reliable heavy-duty bearing unit**
 - Grease lubrication as standard (oil lubrication optional)
 - Heavy-duty bearings offer LB10 bearing life of more than 50 000 hours
 - Common and available bearings used
- 5 Self-aligning roller bearing**
 - Handles high radial load, capable of both direct and belt drive configurations
- 6 Shaft sealing with hydrodynamic expeller and gland packing as an option**
- 7 Shaft sealing by mechanical seal**
 - Other options available
- 8 Front / back impeller clearing vanes**
 - For maximized flow characteristics for high efficiency and long wear life
- 9 Internal clearance adjustments**
 - Easily accomplished via adjustment screw and locking nut


EMW-R features (rubber lined construction)

- 10 Rubber parts**
 - Natural rubber as standard (other types of rubber upon request)
 - Liners contain inserts for strength and durability
 - Closed impeller with optimized hydraulics ensures high efficiency and maximized wear performance over a wide range of services
- 11 Metal-to-metal casing seal**
 - For positive compression and locking of the liners into position




EMW-M features (metal construction)


- 12 Metal-to-metal alignment with O-rings**
 - Provides easy alignment and positive sealing
- 13 Impeller**
 - Closed impeller provides high efficiency
 - Long service life impeller (important thickness)
 - Large flow passage
- 14 Suction nozzle design with anti-vortex ribs for improved wear**
 - For decreased wear to prevent rotation of the pumped liquid
- 15 Floating steel flange with patented locking system**
 - For easy assembly and positive sealing

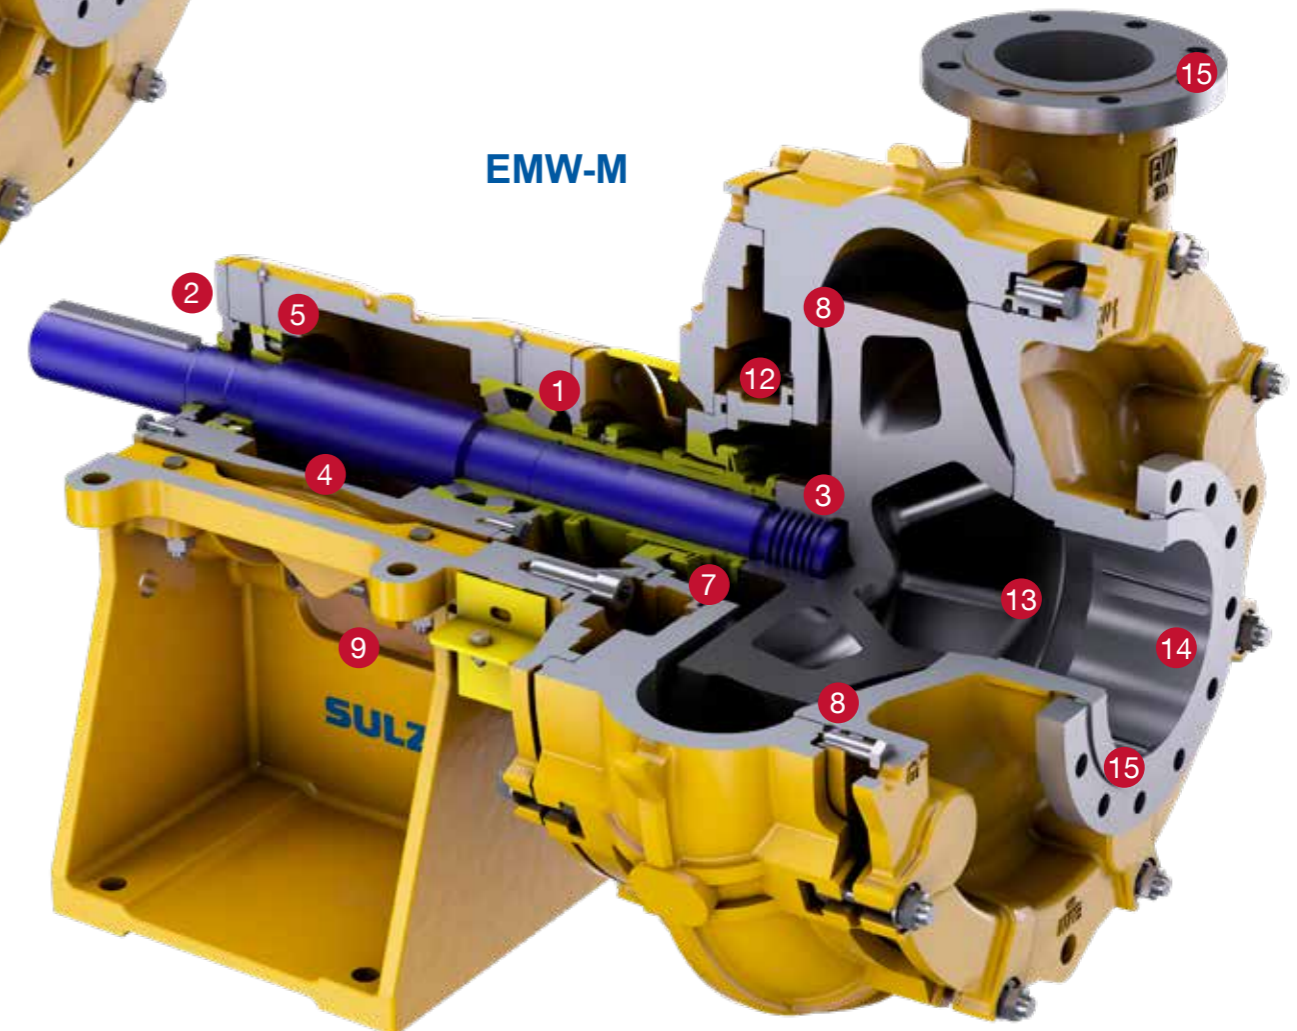

Construction Details

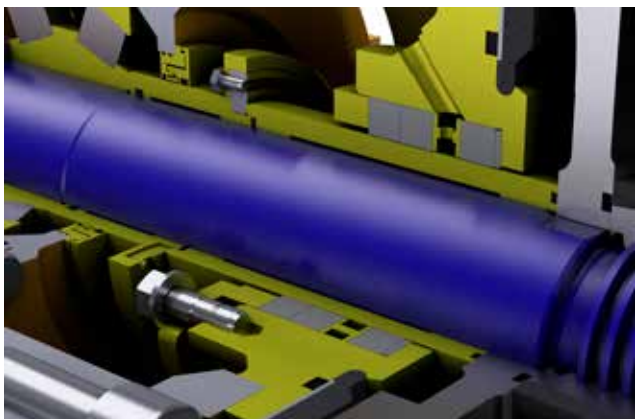

Release collar allows quick and easy removal of the impeller (from size 200).

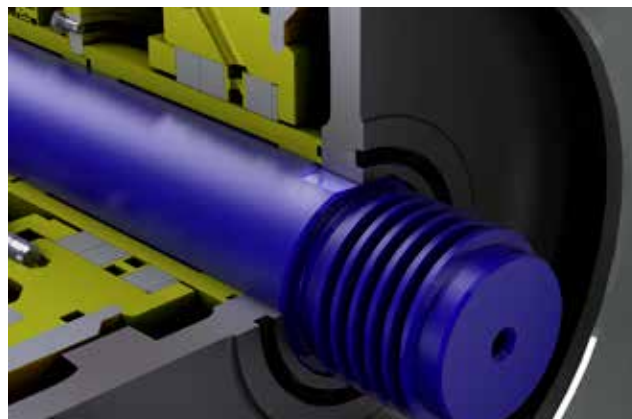

Engagement of expeller and shaft by means of machined surfaces – no key required (from size 100).



Separate and removable suction plate (from size 200).



Clearance adjustment with the adjustable suction plate (from size 200).


Additional Design Features

VA-EMW: Heavy-duty cantilever pumps

- Simple and robust design with ease of maintenance
- Cantilever design without submerged bearings and without shaft seal
- Shaft guided by grease-lubricated roller bearings located above the base plate and sealed off against contamination by a labyrinth ring
- Construction with the bearing assembly under the base plate is possible
- Discharge separate from the shaft line
- Length up to 1.8 m / 70.87 in. Can be extended by means of a suction pipe allowing the pump to operate with a liquid level under the impeller level
- Bearing assembly is sealed off to prevent bearing contamination by liquids or gases/vapors
- Can run dry without risk of damage
- Can be supplied with a V-belt drive
- Available in rubber and metallic versions




Shaft Seals

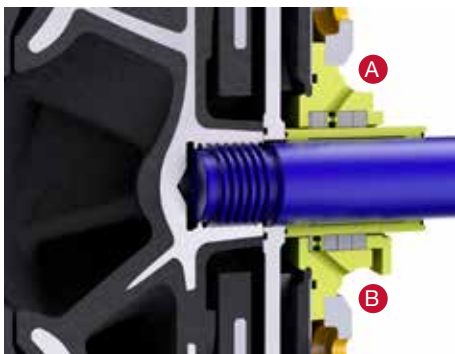

EMW-R hydrodynamic seal system and gland packing

- With low flushing flow rate (plan A)
- With high flushing flow rate (plan B)

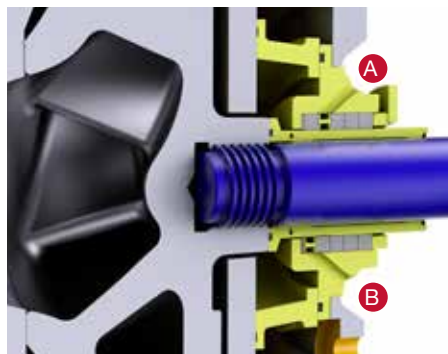


EMW-M seal by gland packing

- With low flushing flow rate (plan A)
- With high flushing flow rate (plan B)



Single mechanical seal by cartridge

- The seal faces are lubricated by the pumped liquid
- The extension seal chamber is equipped with antivortex bars to avoid the rotation of the pumped liquid and to reduce wear

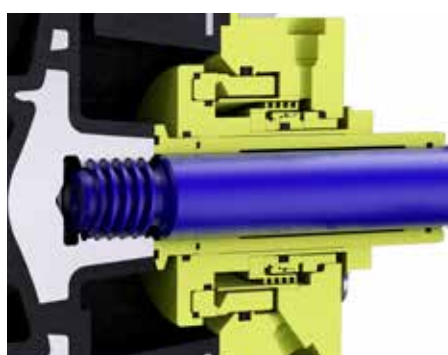

Double cartridge mechanical seal by cartridge

- The seals faces are lubricated by an external source to provide a clean pressurized barrier fluid to a dual pressurized seal
- The extension seal chamber is equipped with antivortex bars to avoid the rotation of the pumped liquid and to reduce wear

Materials

Material alternatives for pump main parts			Nominal chemical composition %					
Description	Code	Internal code	C	Cr	Ni	Mo	Cu	Si
Cast iron ¹⁾	ASTM A48 CL 35 B		-	-	-	-	-	-
Chromium iron ²⁾	ASTM A532 IIIA	EXR	2.0-3.3	23.0-30.0	2.5 max.	3.0 max.	1.2 max.	1.5 max.
Chromium iron ²⁾	Gx100CrMo30-2	CRM	0.9-1.1	29.0-31.0	0.4 max.	1.9-2.2	-	2.0 max.
Material alternatives for other parts								
Lining of EMW-R	Natural rubber	NR	Used at temperature of max +60°C / +140°F					
	Chlorosulfonated polyethylene	CSM	Used at temperature of max +100°C / +212°F					
	Polychloroprene	CR	Used at temperature of max +100°C / +212°F					
	Butyl	IIR	Used at temperature of max +100°C / +212°F					
Gasket material	EPDM VITON		Ethylene propylene VITON					
O-ring material	EPDM VITON		Ethylene propylene VITON					

¹⁾ EMW-R pumps (lined with natural rubber), bearing housing for both pump types

²⁾ EMW-M pumps only



www.sulzer.com

E10464 en 9.2017, Copyright © Sulzer Ltd 2017

This brochure is a general presentation. It does not provide any warranty or guarantee of any kind. Please, contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.