

Discharge connection XJ, XJC, XJS



Flexibility with discharge connections


Discharge connections are available in various sizes, and can be supplied with connection hose, BSP-thread (G), NPT-thread, storz quick-coupling or Alvenius K10.

All discharge connections can be fitted in horizontal or vertical direction (central discharge pumps only vertical).

All discharge connections are sealed efficiently with an o-ring between the discharge connection and the main outer casing. O-ring and screws are delivered together with the pump.

PLEASE NOTE!

Lubrication of threaded spigots is required before assembly of storz or other quick couplings.

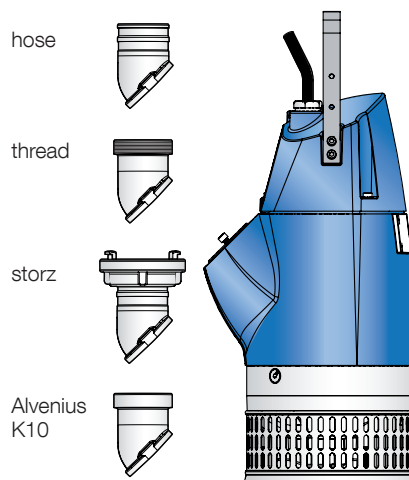

Discharge connections

P/N XJ/XJS 25 - XJ/XJS 40 XJS 50 - XJS 110	Size	P/N XJ 50 - XJ 110 XJC 50 - XJC 110	Size
61170137	2 1/2"	00833077	3"
61170138	3"	00833081	4"
61170133	4"	00833085	6"
32820519	2 1/2" G/BSP	00833079	3" G/BSP
32820517	3" G/BSP	00833083	4" G/BSP
32820518	4" G/BSP	00833086	6" G/BSP
00830489	2 1/2" NPT	00833111	3" NPT
32820520	3" NPT	00833112	4" NPT
32820524	4" NPT	00833087	6" NPT
00830344	3" Storz	00863351	3" Storz
00830345	4" Storz	00863352	4" Storz
00831945	3" Alvenius K10	00863353	6" Storz
00830426	O-ring	00833493	3" Alvenius K10
		00833494	4" Alvenius K10
		11121011	O-ring

Storz - with hose connection

P/N	Size
15000005	2" / C
15000006	3" / B
15000017	4" / A
15000016	6" / F



Storz - with internal thread

P/N	Size
15000009	2" / C
15000024	3" / B
15000022	4" / A
15000027	6" / F



Locking key for Storz

P/N	Size
15010020	2"/C, 3"/B, 4"/A, 6"/F
00830256	F 6"

*2 pcs locking key is needed