


SJD-CEP vertical multistage can pump for condensate extraction



Sulzer SJD-CEP pumps are specified wherever limited Net Positive Suction Head (NPSH) is available, either due to system constraints or liquids operating near their vapor pressure. Typical uses include high temperature condensate extraction, heater drain and working fluid pumps in:

- Thermal power plants
- Combined cycle power plants
- Nuclear power plants
- Industrial power plants
- Concentrated solar power plants
- Geothermal power plants

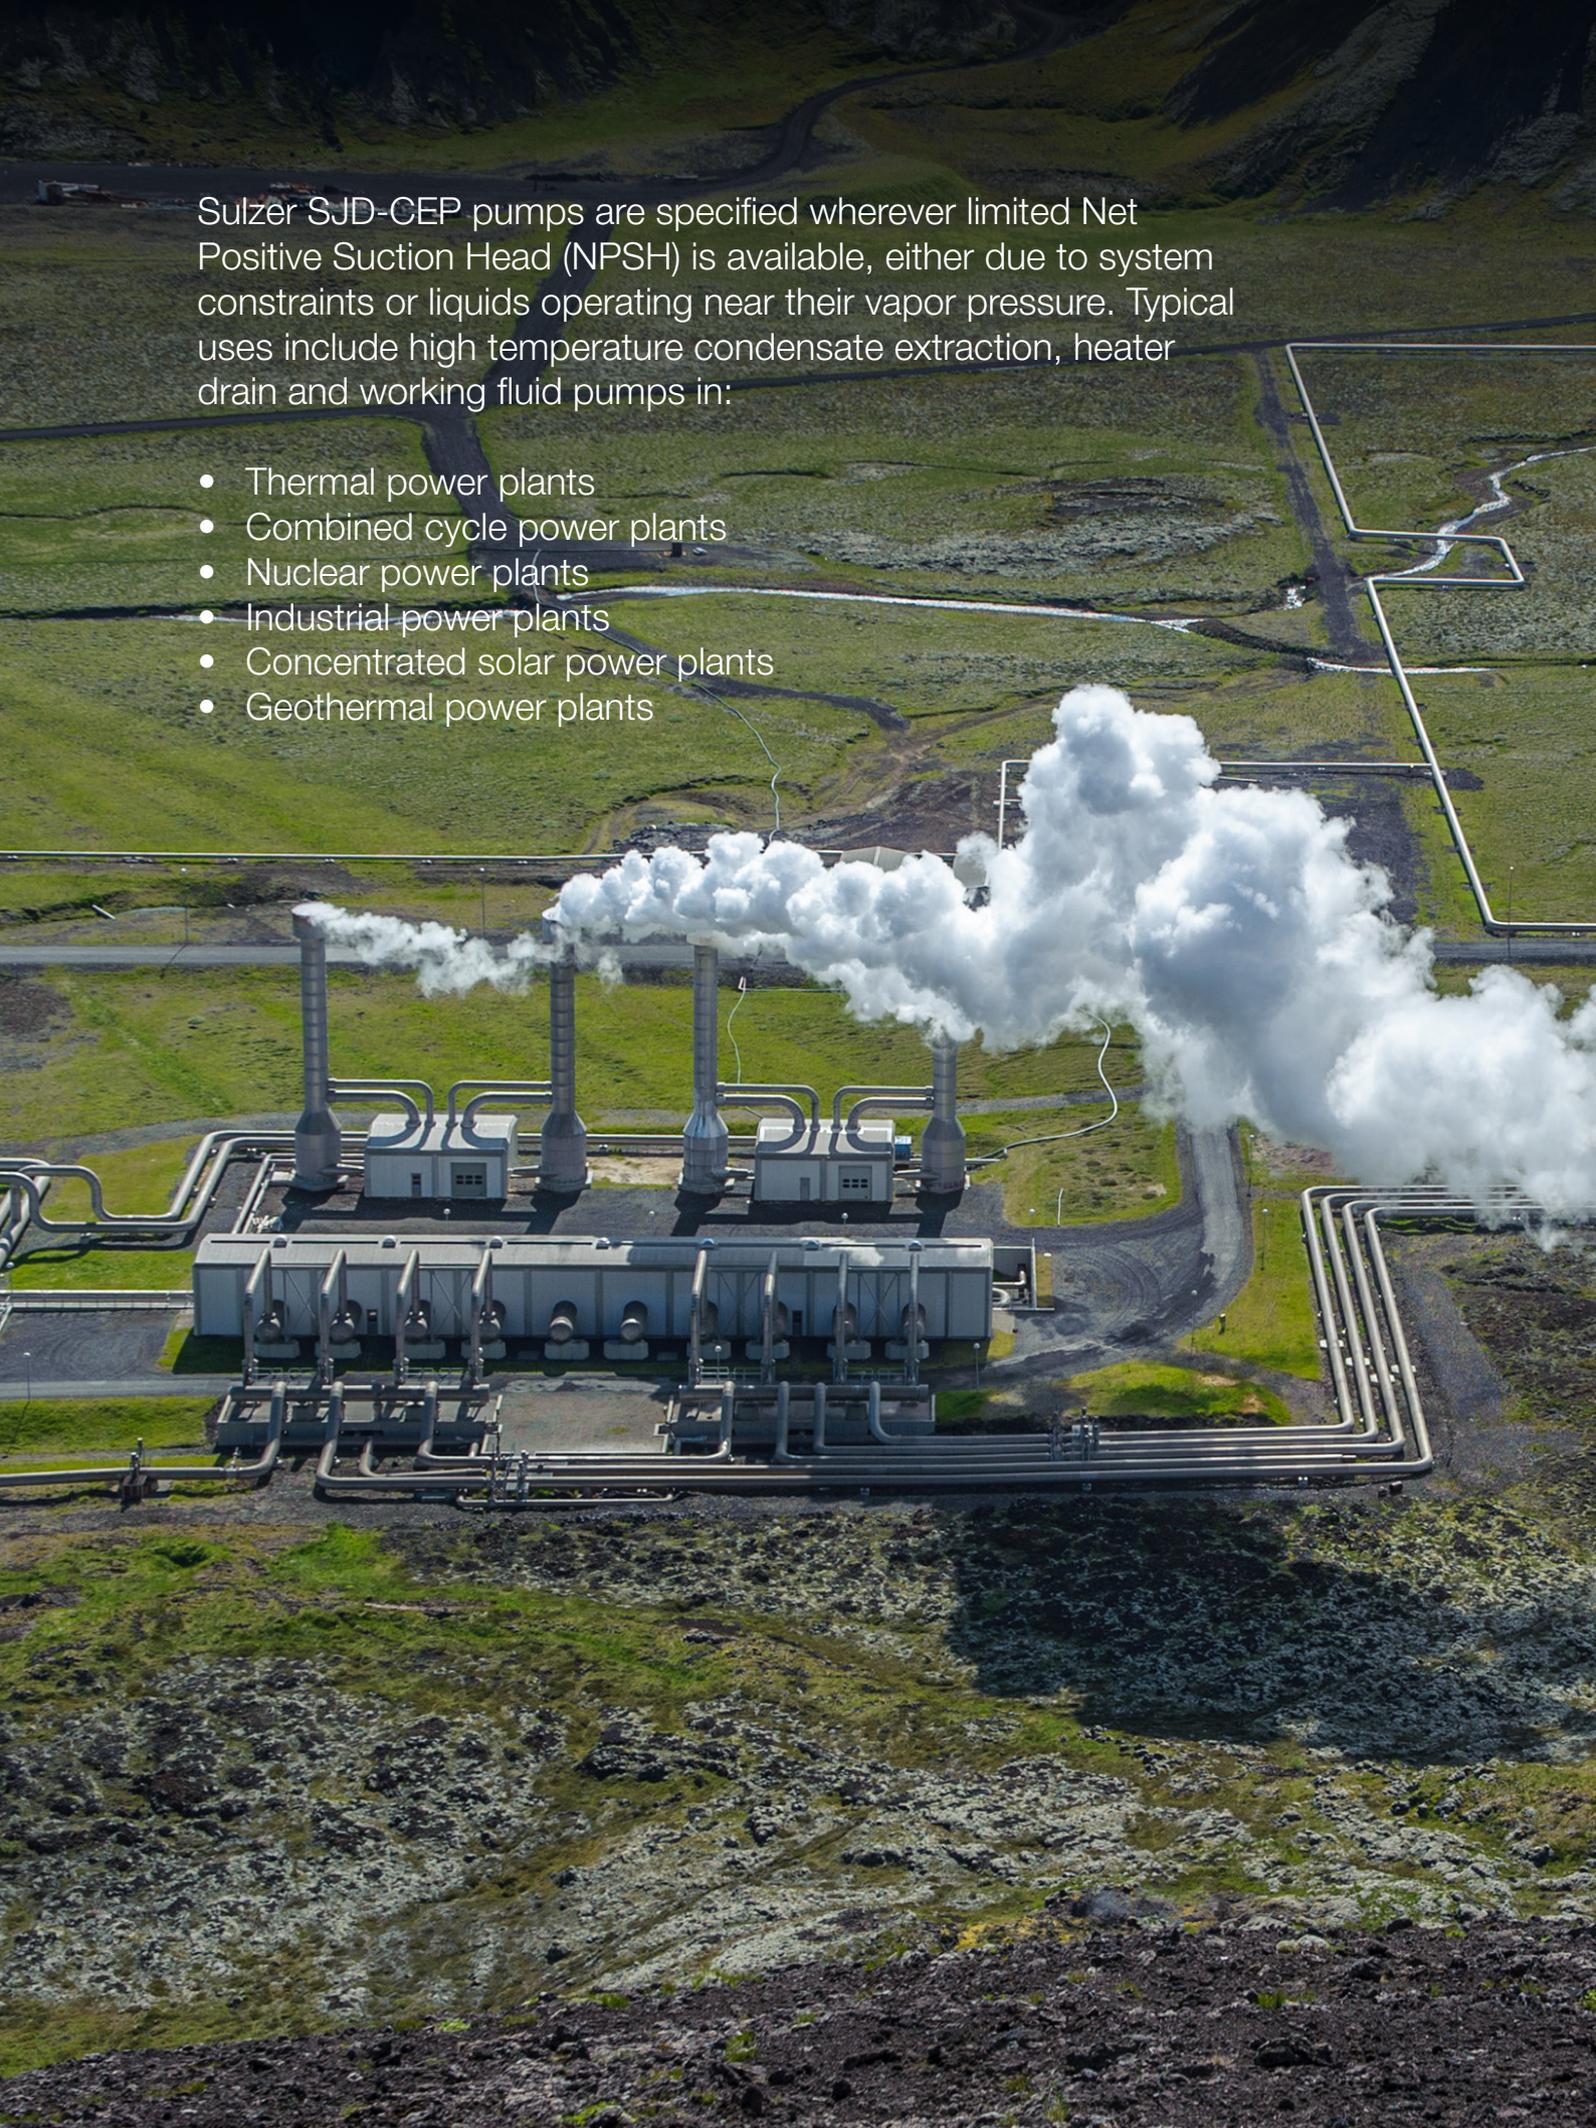

Features and benefits

1 Single suction high Nss (suction specific speed) or double suction low Nss first stage

- Reduced Net Positive Suction Head required (NPSHr)

2 Replaceable wear ring surface for impellers and bowls

- Allows conservation of the running clearances

3 Carbon graphite product lubricated bearing in bowls and columns

- Long maintenance-free periods

4 Shaft sealing by single or double mechanical seal with removable seal housing

- Allows servicing throttle bushing without removing the head

5 Axial thrust bearing in pump or in motor

- Adaptable to IEC or NEMA motors

6 Cast or fabricated suction and discharge head with separate fabricated driver stand

- Allows using one suction and discharge head per pump size

7 Spacer coupling

- Allows servicing the mechanical seal and thrust bearing as needed

8 Can provided with lateral and anti-rotational ribs

- Uniform inlet velocity along the can length



SJD-CEP
single suction

SJD-CEP
double suction

Specifications


Materials


Pump part	Material
Bowl	Cast iron, carbon steel, chrome steel
Impeller	Cast Iron, chrome steel
Shaft	Chrome steel
Can, column, discharge head	Carbon steel

Operating data

	50 Hz	60 Hz
Bowl sizes	390 to 1'488 mm	15.4 to 63.1 in.
Capacities	170 to 4'900 m ³ /h	924 to 21'560 USgpm
Heads	up to 470 m	up to 1'540 ft.
Pressures	up to 47 bar	up to 680 psi
Temperatures	up to 100°C	up to 212°F

Performance range

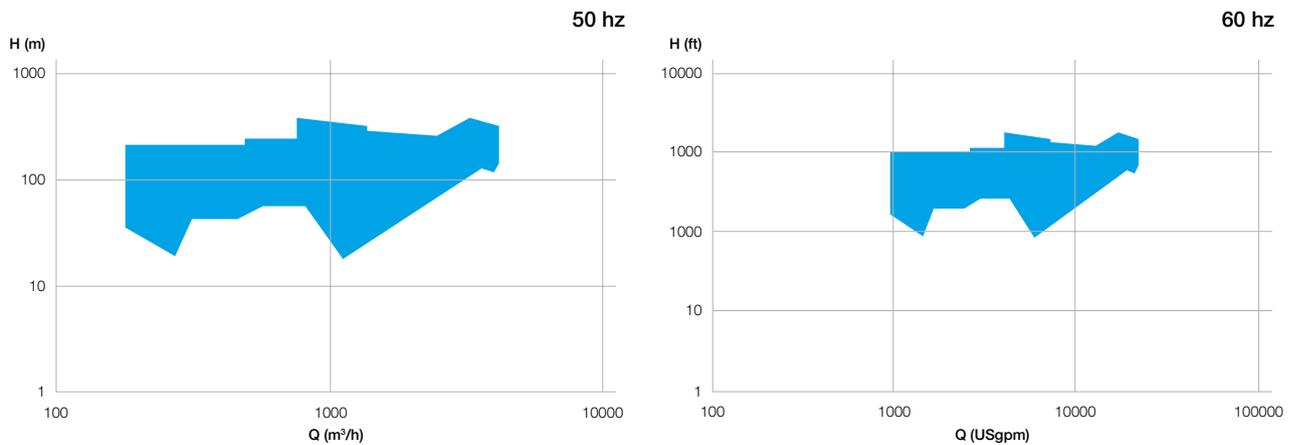

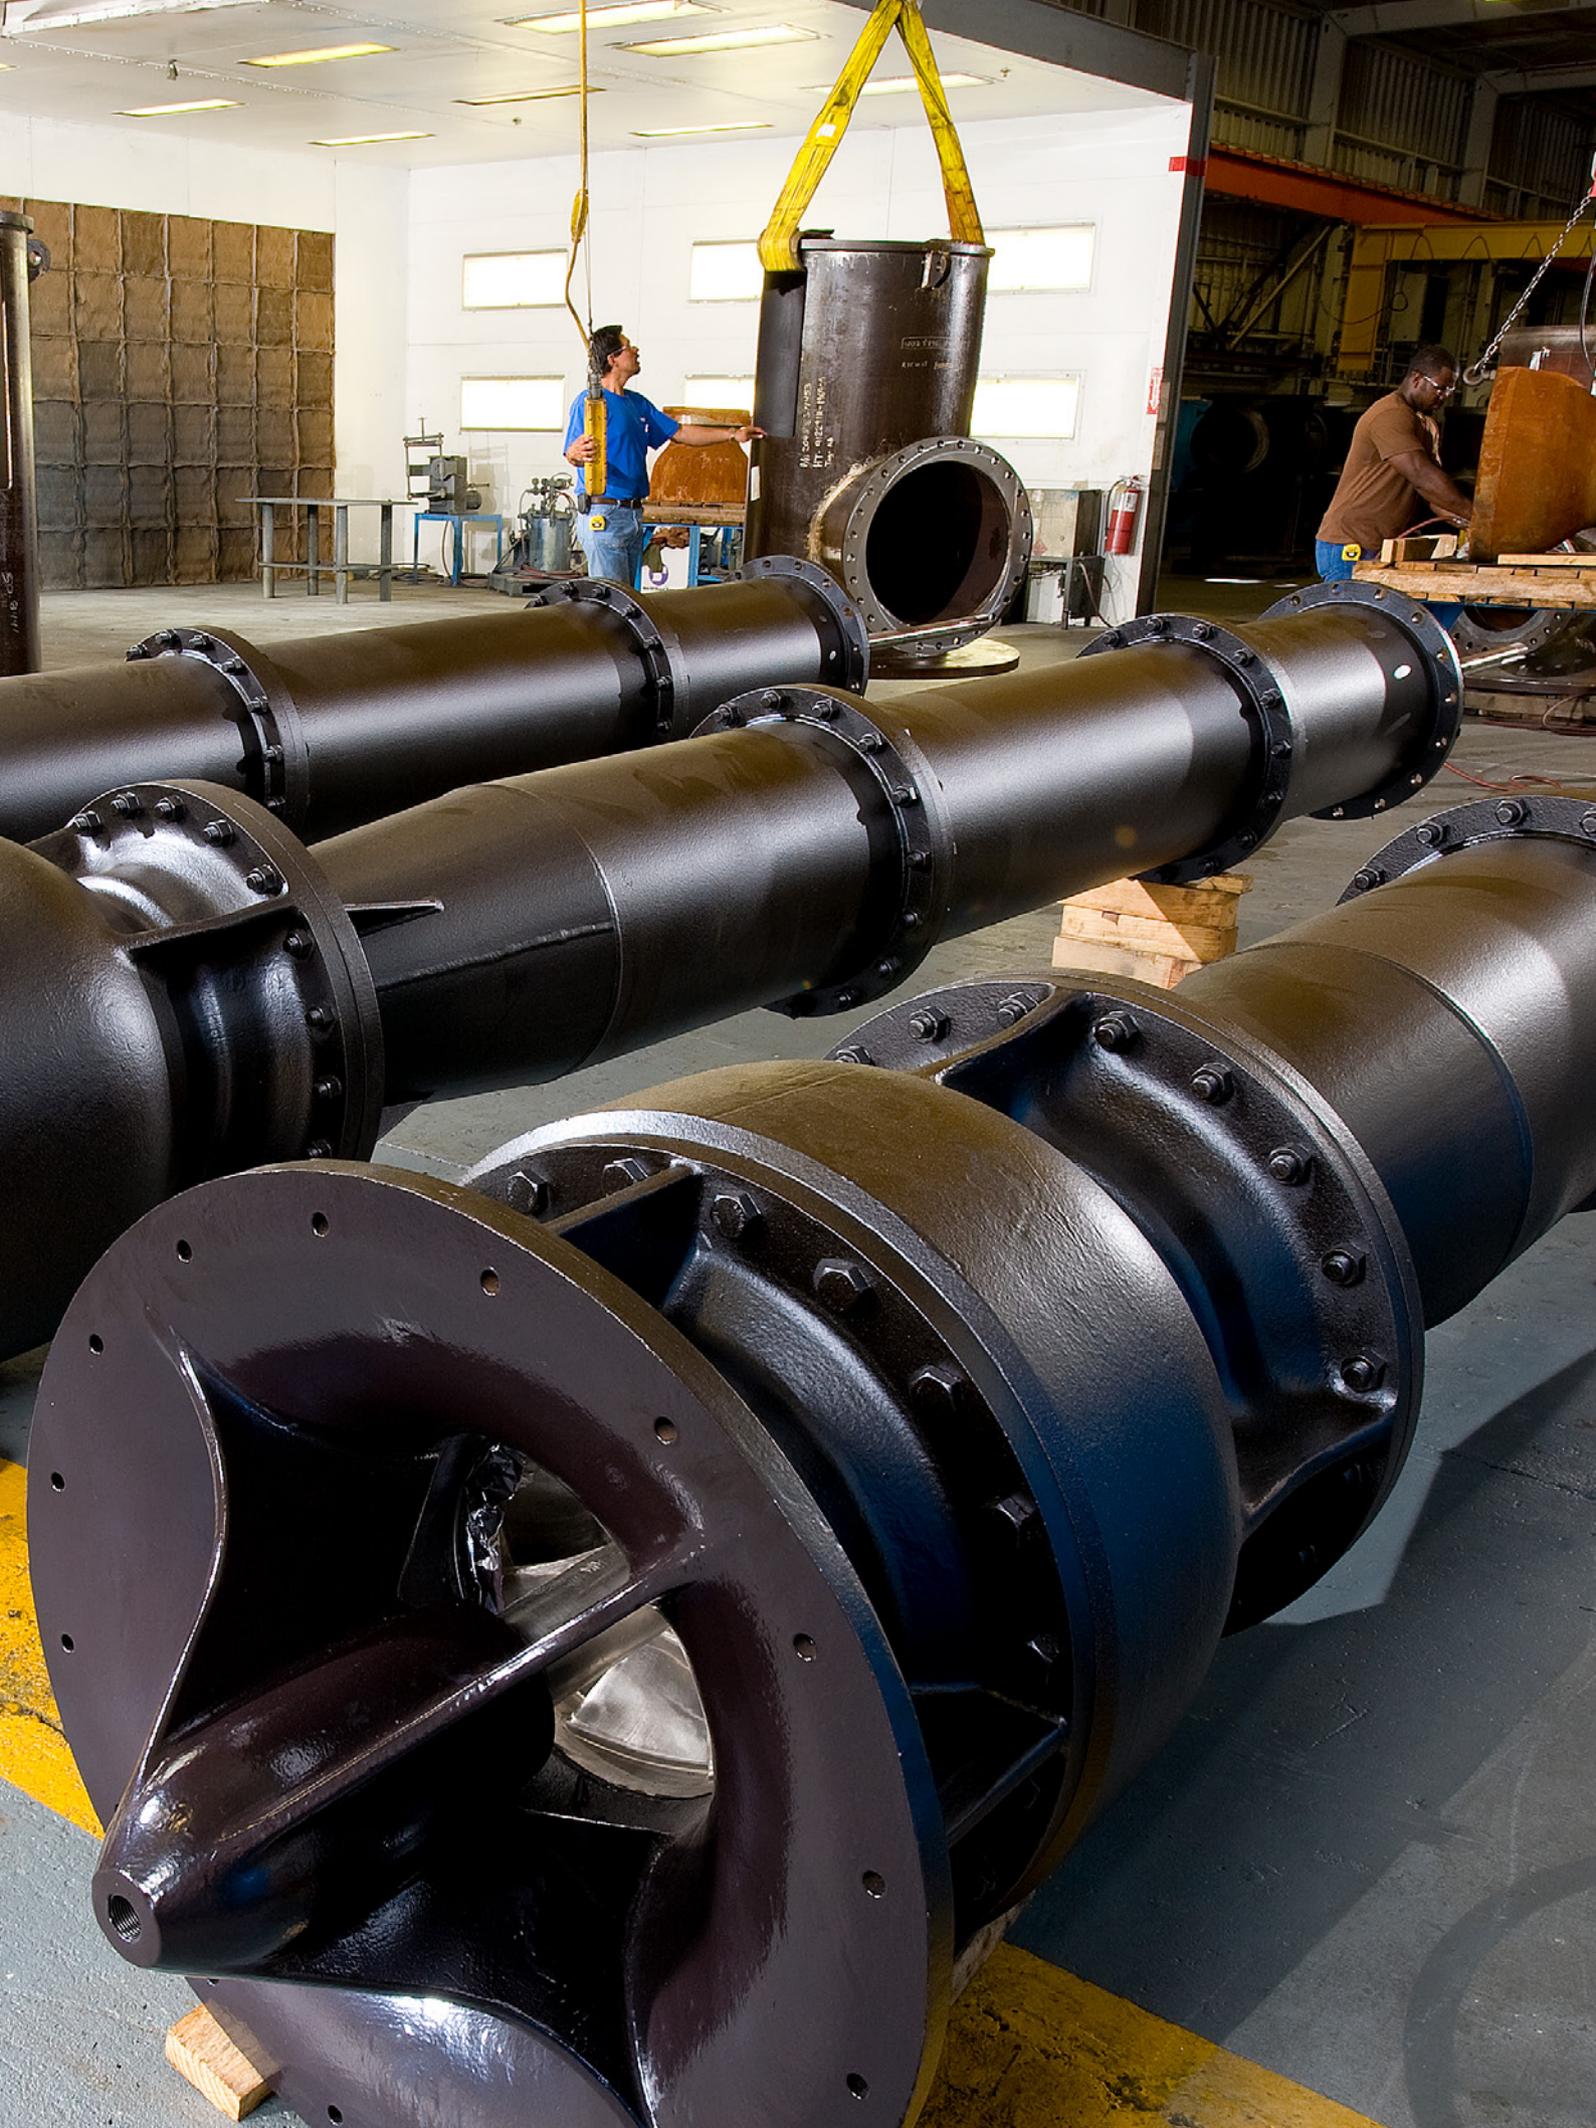

The Sulzer Flow division keeps your processes flowing. Wherever fluids are treated, pumped, or mixed, we deliver highly innovative and reliable solutions for the most demanding applications.

The Flow division specializes in pumping solutions specifically engineered for the processes of our customers. We provide pumps, agitators, compressors, grinders, screens and filters developed through intensive research and development in fluid dynamics and advanced materials. We are a market leader in pumping solutions for water, oil and gas, power, chemicals and most industrial segments.

E00728 en 11.2024, Copyright © Sulzer Ltd 2024

This brochure is a general presentation. It does not provide any warranty or guarantee of any kind. Please, contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.

