

## HICoat<sup>®</sup> P23 – high performance thermal barrier coating (TBC)



Thermal barrier coatings (TBCs) are designed to meet the ever-increasing demands of companies looking for improved durability and longer service life for their turbine engines. They work by protecting the gas turbine hot section from thermally induced degradation and improving thermodynamic efficiency, which is becoming increasingly important in both aircraft and land based industrial turbine engines.

Most TBCs utilize a two-layer coating system. The bond coat acts to provide adhesion between the metal substrate and the ceramic topcoat while providing oxidation protection to the underlying substrate alloy. The topcoat acts as a heat shield, insulating the substrate alloy, thereby allowing higher operating temperatures and/or reductions in cooling requirements.

Sulzer offers HICoat P23, a high-performance TBC that can be utilized on hot sections of a gas turbine engine. In addition to its smooth exterior surface, HICoat P23 offers the benefits of:

- Increased oxidation and corrosion resistance due to property of powder chemistry.
- Increased bond strength due to optimal porosity levels.

Examples of components which can benefit from this application include turbine nozzles, vane segments, and turbine blades/buckets.



Figure 1: HVOF MCrAlY application

---

### The Sulzer plus

---

- Smooth surface finish
  - Improved performance
  - Oxidation and corrosion resistance
-

## Increased performance

Sulzer's HiCoat P23 achieves increased oxidation and corrosion resistance through the use of a high velocity oxyfuel (HVOF) applied MCrAlY bond coat. The HVOF process produces coatings that contain minimal porosity and low oxide content. The bond coat acts to provide adhesion between the metal substrate and the ceramic topcoat while providing oxidation and corrosion protection to the underlying substrate alloy. The top coat acts as a heat shield, insulating the substrate alloy, thereby allowing higher operating temperatures and/or reductions in cooling requirements.

In addition to its smooth exterior surface, the custom powder used to create P23 improves the performance of the TBC. As seen in Figure 2, the porosity is uniformly distributed throughout, leading to higher bond strengths which produce less stress within the coating. Lower stress within the coating make the P23 TBC especially suited for 1st and 2nd stage turbine vanes and blades. Most importantly, the thermal spray and robotic equipment are capable of applying the coating to the full gas path of two portion nozzles that reduce oxidation and thermal fatigue cracking in problematic areas.

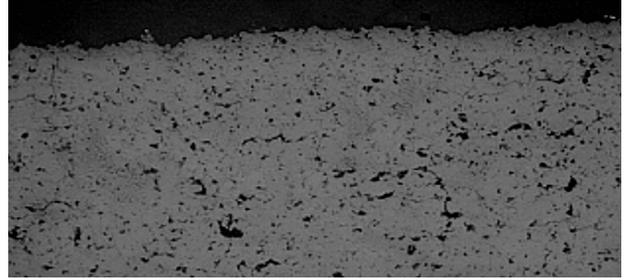



Figure 2: P23 TBC (~0.010")



P23 TBC applied to full gas path of nozzle segment

### HiCoat® P23

<b>Bond coat</b>	Powder	MCrAlY
	Process	HVOF
	Thickness	0.004" - 0.006"
<b>Intermediate coat</b>	Powder	MCrAlY
	Process	Air plasma spray
	Thickness	0.0005" - 0.002"
<b>Top coat</b>	Specification	STSH proprietary
	Powder	ZrO <sub>2</sub> -8Y <sub>2</sub> O <sub>3</sub>
	Process	Air plasma spray
	Thickness	0.008" - 0.015"

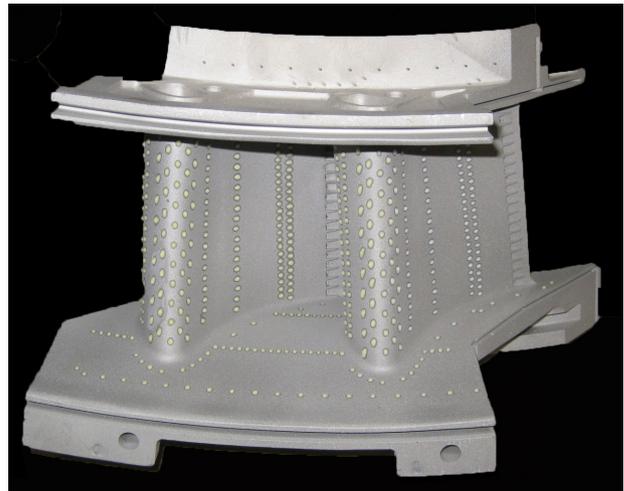

Polymer masking used to keep cooling passages clear

### Sulzer Turbo Services Houston Inc.

Houston Service Center  
11518 Old La Porte Road  
La Porte, TX 77571, USA  
Tel. +1 713 567 2700  
sulzerhouston@sulzer.com



**How can we help you?**  
**Contact us today to find your best solution.**

[sulzer.com](http://sulzer.com)

E10308 en 04.2024, Copyright © Sulzer Ltd 2024

This brochure is a general product presentation. It does not provide a warranty or guarantee of any kind. Please contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.