

Submersible Mixed Flow Column Pump Type ABS AFLX PE7

SULZER

50 Hz



The submersible mixed-flow column pump type ABS AFLX is designed for use where large volumes of process water or wastewater containing solid effluent must be pumped. Equipped with a Premium Efficiency IE3 motor, it is suitable for:

- Hazardous locations-Approval for ATEX II 2G Ex db IIB T4 Gb, FM, see table "Motor power and speed overview".
- Sewage in combination with screens.
- Combined sewage and surface water.
- Storm water protection. Industrial raw water. Active sludge.

Construction

- Premium Efficiency motors in accordance with IEC 60034-30 level IE3 with testing in accordance with IEC 60034-2-1.
- Premium Efficiency motors designed for VFD operation in accordance with IEC/TS 60034-25 A ($U_{peak} < 1300$ V).
- The water-tight fully flood-proof motor and the pump section form a compact and robust unit, easy to clean and easy to service.
- Optimum motor cooling by directing the medium being pumped over the motor.
- Water pressure sealed connection chamber, with two stage cable entry, protected against excessive cable tension and bending.
- Insulation system: Class H.
- Thermal protection sensors in the stator which open at 140 °C.
- Rotor and rotor shaft dynamically balanced.
- Upper and lower bearings lubricated-for-life, maintenance-free.
- Insulated upper bearing for VFD operation.
- Triple shaft sealing.
- Upper mechanical seal from SiC/SiC and lower mechanical seal from SiC/SiC, independent of the direction of rotation.
- Inspection chamber with sensor for moisture protection to indicate water leakage through mechanical seal.
- Hydraulic parts with axial propeller with 3 or 4 adjustable propeller blades.
- Gearbox available from 300 kW for AFLX 1202 to AFLX 1207.
- Hydraulics with mixed flow impeller. Hydraulics with diffuser and adjustable wear gap at the suction side.

Motor

Water pressure sealed Premium Efficiency motors, (3-phase, squirrel cage induction motors), from 160 to 550 kW and, depending on hydraulic requirements as 4- to 12-pole versions.

Voltage: 380... 420 V, 3~, 50 Hz (other voltages on request)

Temperature rise: According to NEMA class B.

Insulation system: Class H (winding protection by 140 °C sensor)

Protection type: IP68

Start-up: DOL (direct on line), VFD, soft starter or star-delta.

Motor power and speed overview

pole	Motor Power P_2 in kW (50 Hz)							
4	300*	350*	400*	450*	500*	550	600	650
6	250*	300*	350*	400	450	500	550	
8	160*	200*	250*	300*	350	400	450	
10	160*	200*	250	300	350			
12	160	200	250	300				

*available in ATEX



Pump selection

To access more detailed information like pump performance curves, dimensional drawings, product description and motor performance curves, please use our ABSEL program:

<https://absel.sulzer.com/> **Hydraulic selection:**

-> Enter: Duty point -> Select: Hydraulics -> Select: Motor

Hydraulics

You have the choice of the following hydraulics for the nominal pipe diameter 1200 mm and larger.

For power demand beyond available range PE7 please refer to technical data sheet AFLX PE4 to PE6.


Installation

Suitable for installation in steel or concrete riser pipes for economical operation and simple installation. The centering of the pump and sealing between pump and pipeline is achieved automatically by means of conical coupling ring. No additional installation work required.

Hydraulics / Impeller type

Hydraulics	Impeller type
AFLX 1202 / 1203 / 1207	5-blades

Performance field

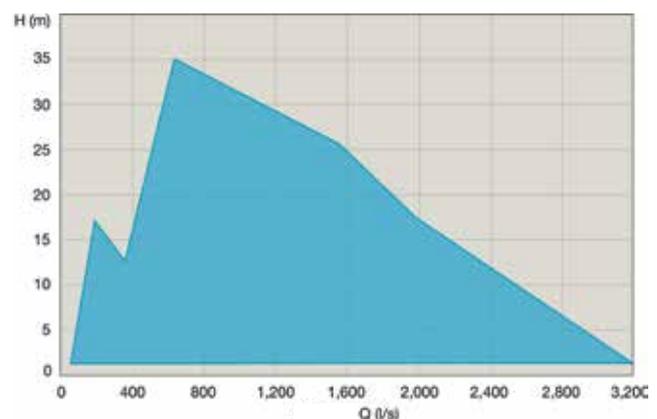

Standard and options

Description	Standard	Option
Max. ambient temperature	40 °C	60 °C
Max. submergence depth	20 m	
Mains voltage	380...420 V/50 Hz	other voltage on request
Voltage tolerance	multi-voltage $\pm 5\%$; 400 V $\pm 10\%$	
Insulation system	Class H	Class H (160 °C) non ATEX
Start-up	DOL (direct on line), VFD or soft starter	star-delta
Approval	non Ex	Ex/ATEX according to table "Motor power and speed overview"
Cables	H07RN8-F	EMC shielded cables
Cable length	10 m	15 m, 20 m other length on request
Mechanical seal (medium side)	SiC-SiC (NBR)	SiC-SiC (Viton execution)
Mechanical seal (motor side)	SiC-SiC (NBR)	
O-rings	NBR	Viton
Preparation for lifting hoist	Lifting hoop	Lifting hoop in stainless steel
Protective coating	Two component coating epoxy resin	Special coatings on request
Cathodic protection		Zinc anodes on request
Installation	Wet-well in steel pipe or concrete riser pipe	
Motor cooling	By surrounding medium	
Moisture sensor motor housing	DI (sensor for moisture detection)	
Moisture sensor Connection chamber	DI (sensor for moisture detection)	
Moisture sensor Inspection chamber	DI (sensor for moisture detection)	
Vibration sensor		on request

Motor protection

PE7		standard	Ex/ATEX
Winding	Bi-metallic switch	X	X*
	Thermistor (PTC)	O	O*
	PT 100	O	O
Seal protection	Inspection chamber	X	O
	Motor housing	X	X
	Connection box	X	X
Temperature bearing upper/lower	Bi-metallic switch	X	X
	Thermistor (PTC)	O	O
	PT 100	O	O
Vibration sensor	0 - 20 mm/s	O	O

X = Standard; O = Option; * PTC to be used when operated via VFD.

Materials

Motor	Standard	Option	Lifting device	Standard	Option
Connection chamber	EN-GJL-250		Lifting hoop	1.0060	1.4462
Cooling/oil chamber	EN-GJL-250		Connection system		
Motor housing	EN-GJL-250		Coupling ring	1.0446	1.4408
Motor shaft	1.4021	1.4462			
Fasteners (medium contact)	1.4401				

Hydraulics		
Diffuser	EN-GJL-250	
Bellmouth	EN-GJL-250	1.4470
Impeller	EN-GJL-250	1.4470
Impeller washer	EN-GJS-400-18	1.4462
Fasteners (medium contact)	1.4401	

Please contact your SULZER representative for proposal of an effective suction chamber design!

www.sulzer.com

AFLX PE7 50Hz en (04.2017), Copyright © Sulzer Ltd 2017

This document does not provide a warranty or guarantee of any kind. Please contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.