

Submersible Propeller Pump Type ABS VUPX PE7

SULZER

50 Hz



The submersible propeller pump type ABS VUPX is designed for use where larger water volumes without fibrous materials must be pumped up to relatively low heads (up to approx. 10 m). Equipped with a Premium Efficiency IE3 motor, it is suitable for:

- Hazardous locations - Approval for ATEX 2G Ex db IIB T4 Gb, FM, see table "Motor power and speed overview".
- Return sludge or return activated sludge (RAS).
- Combined sewage and surface water.
- Storm water protection, irrigation and aquaculture.
- Industrial raw water and process water.

Construction

- Premium Efficiency motors in accordance with IEC 60034-30 level IE3 with testing in accordance with IEC 60034-2-1.
- Premium Efficiency motors designed for VFD operation in accordance with IEC/TS 60034-25 A ($U_{peak} < 1300$ V).
- The water-tight fully flood-proof motor and the pump section form a compact and robust unit, easy to clean and easy to service.
- Optimum motor cooling by directing the medium being pumped over the motor.
- Water pressure sealed connection chamber, with two stage cable entry, protected against excessive cable tension and bending.
- Insulation system: Class H.
- Thermal protection sensors in the stator which open at 140 °C.
- Rotor and rotor shaft dynamically balanced.
- Upper and lower bearings lubricated-for-life, maintenance-free.
- Insulated upper bearing for VFD operation.
- Triple shaft sealing.
- Upper mechanical seal from SiC/SiC and lower mechanical seal from SiC/SiC, independent of the direction of rotation.
- Inspection chamber with sensor for moisture protection to indicate water leakage through mechanical seal.
- Hydraulic parts with axial propeller with 3 or 4 adjustable propeller blades.
- Gearbox available from 300 kW for VUPX 1001 to VUPX 1202.

Motor

Water pressure sealed Premium Efficiency motors, (3-phase, squirrel cage induction motors), from 160 to 650 kW and, depending on hydraulic requirements as 4- to 12-pole versions.

Voltage: 380... 420 V, 3~, 50 Hz (other voltages on request)

Temperature rise: According to NEMA class B.

Insulation system: Class H (winding protection by 140 °C sensor)

Protection type: IP68

Start-up: DOL (direct on line), VFD, soft starter or star-delta.

Motor power and pole overview

pole	Motor Power P_2 in kW (50 Hz)							
4	300*	350*	400*	450*	500*	550	600	650
6	250*	300*	350*	400	450	500	550	
8	160*	200*	250*	300*	350	400	450	
10	160*	200*	250	300	350			
12	160	200	250	300				

*available in ATEX



Pump selection

To access more detailed information like pump performance curves, dimensional drawings, product description and motor performance curves, please use our ABSEL program:

<https://absel.sulzer.com/> Hydraulic selection:

-> Enter: Duty point -> Select: Hydraulics -> Select: Motor

Hydraulics

You have the choice of the following hydraulics for the nominal pipe diameter 1000 to 1400 mm.

For power demand beyond available range PE7 please refer to technical data sheet VUPX PE4 to PE6.


Installation

Suitable for installation in steel or concrete riser pipes for economical operation and simple installation. The centering of the pump and sealing between pump and pipeline is achieved automatically by means of conical coupling ring. No additional installation work required.

Hydraulics / Propeller type

Hydraulics	Propeller type
VUPX 801 / 802	3-blades / 4-blades; adjustable
VUPX 1001 / 1002	3-blades / 4-blades; adjustable
VUPX 1201 / 1202	3-blades / 4-blades; adjustable

Performance field

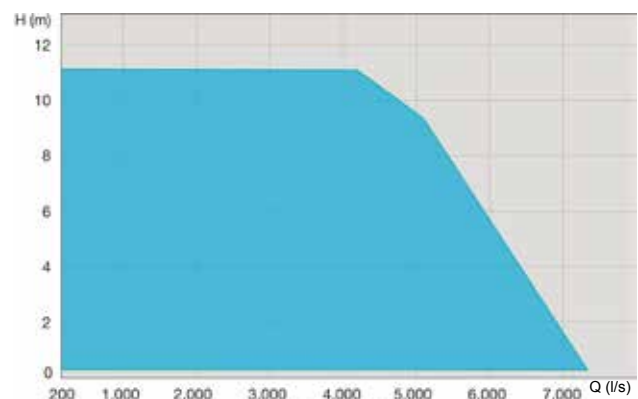

Standard and options

Description	Standard	Option
Max. ambient temperature	40 °C	60 °C
Max. submergence depth	20 m	
Mains voltage	380...420 V/50 Hz	other voltage on request
Voltage tolerance	multi-voltage ± 5 %; 400 V ± 10 %	
Insulation system	Class H	Class H (160 °C) non ATEX
Start-up	DOL (direct on line), VFD or soft starter	star-delta
Approval	non Ex	Ex/ATEX according to table "Motor power and pole overview"
Cables	H07RN8-F	EMC shielded cables
Cable length	10 m	15 m, 20 m other length on request
Mechanical seal (medium side)	SiC-SiC (NBR)	SiC-SiC (Viton execution)
Mechanical seal (motor side)	SiC-SiC (NBR)	
O-rings	NBR	Viton
Preparation for lifting hoist	Lifting hoop	Lifting hoop in stainless steel
Protective coating	Two component coating epoxy resin	Special coatings on request
Cathodic protection		Zinc anodes on request
Installation	Wet-well in steel pipe or concrete sump	
Motor cooling	By surrounding medium	
Moisture sensor motor housing	DI (sensor for moisture detection)	
Moisture sensor Connection chamber	DI (sensor for moisture detection)	
Moisture sensor Inspection chamber	DI (sensor for moisture detection)	
Vibration sensor		on request

Motor protection

PE7		standard	Ex/ATEX
Winding	Bi-metallic switch	X	X*
	Thermistor (PTC)	O	O*
	PT 100	O	O
Seal protection	Inspection chamber	X	X
	Motor housing	X	X
	Connection box	X	X
Temperature bearing upper/lower	Bi-metallic switch	X	X
	Thermistor (PTC)	O	O
	PT 100	O	O
Vibration sensor	0 - 20 mm/s	O	O

X = Standard; O = Option; * PTC to be used when operated via VFD.

Materials

Motor	Standard	Option	Hydraulics	Standard	Option
Connection chamber	EN-GJL-250		Diffuser	EN-GJL-250	
Cooling/oil chamber	EN-GJL-250		Bellmouth	EN-GJL-250	1.4470
Motor housing	EN-GJL-250		Wear ring	1.4008	1.4470
Motor shaft	1.4021	1.4462	Propeller hub	EN-GJS-400-18	1.4581
Fasteners (medium contact)	1.4401		Propeller blades	1.4340	1.4581
Lifting device			Propeller cap	PUR	
Lifting hoop	1.0060	1.4462	Fasteners (medium contact)	1.4401	
Connection system					
Coupling ring	1.0446	1.4408			

Please contact your SULZER representative for proposal of an effective suction chamber design!

www.sulzer.com

VUPX PE7 50Hz en (04.2017), Copyright © Sulzer Ltd 2017

This document does not provide a warranty or guarantee of any kind. Please contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.