

Submersible Chopper Pump Type ABS XFP 100E and 150G

SULZER


Robust, reliable, submersible chopper pumps, with Premium Efficiency motors from 7.5 to 10.5 kW. For the pumping of heavily contaminated commercial, industrial, municipal and agricultural wastewater, sewage and sludge, in wet well installations.

Features

- The water-pressure-tight, encapsulated, flood-proof motor and the pump section form a compact, robust, modular construction.
- NEMA Class A temperature rise.
- Premium Efficiency motors in accordance with IEC 60034-30 level IE3* with testing in accordance with IEC60034-2-1.
- Continuously rated motor.
- Double mechanical seals. SiC-SiC at the medium side; SiC-C (100E) and SiC-SiC (150G) at the motor. XFP 150G has an additional inner lipseal at the motor side. All seals are independent of rotation direction and resistant to temperature shock.
- Anti-wicking cable plug solution (100E), or water-pressure-sealed connection chamber (150G).
- Hardened chopper impeller and cutter plate efficiently reduces large solids or fibrous materials to ensure optimum blockage-free pumping.
- Lubricated-for-life bearings with a calculated lifetime of minimum 50 000 hrs. (100E), and 100 000 hrs. (150G).
- Stainless steel shaft. Designed with high safety factor to prevent fatigue fracture.
- Temperature monitoring by thermal sensors (140 °C) in the stator windings.
- Seal monitoring by a moisture probe (DI) in the motor and seal chambers (100E), or motor and oil chambers (150G), which signals an inspection alert if there is leakage at the shaft seals.
- Smooth outer design to reduce rag build-up.
- Stainless steel lifting hoop.
- DN 100 and DN 150 radial slot DIN flange discharge.
- Maximum allowable temperature of the medium for continuous operation is 40 °C.
- Maximum submergence depth of 20 m.
- Explosion-proof as standard, in accordance with international standard ATEX 2014/34/EU [II 2G Ex db IIB T4 Gb].

* See Technical Data Table.

Performance Curves

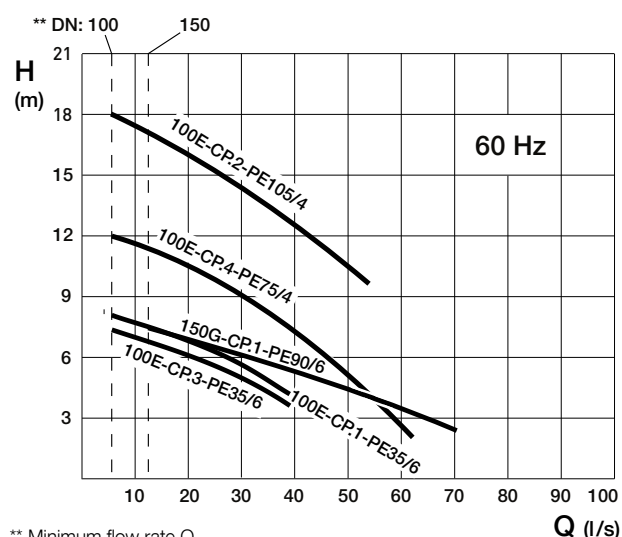

** Minimum flow rate Q.

Please use the ABSEL program as the only valid selection tool.



Motor

Premium Efficiency IE3, three-phase, squirrel-cage motor, 460 V, 60 Hz, 4-pole [1 750 r/min] and 6-pole [1 180 r/min].

Voltage tolerance: ± 10%

Protection type: IP 68

Stator insulation: Class H

Start-up: direct on line (DOL) or star-delta (YΔ).

Cooling: 100E self-cooling, 150G by the medium.

Service factor: 1.3

Motors with other operating voltages and frequencies are also available (DOL and YΔ).

Identification Code

e.g. XFP 100E CP.4 PE75/4-E-60

Hydraulics:

XFP Product range

10.....Discharge outlet DN [cm]

0Hydraulic type

EVolute opening [dia. mm]

CP.....Chopper impeller

4Impeller size

Motor:

PE Premium Efficiency

75 Motor power P_2 kW x 10

4Number of poles

EVolute opening [dia. mm]

60Frequency

Materials

Description	Material
Motor housing	Cast iron EN-GJL-250
Volute	Cast iron EN-GJL-250
Impeller	Cast iron EN-GJS-600-3
Bottom plate	Cast iron EN-GJL-300
Motor shaft	Stainless steel 1.4021 (AISI 420)
O-rings	NBR
Lifting hoop	Stainless steel 1.4401 (AISI 316)
Fasteners	Stainless steel 1.4401 (AISI 316)

Technical Data

XFP	Motor	IEC rating	Impeller size	Rated voltage (V)	Motor power* (kW)		Rated current (A)	Speed (r/min)	Cable size	Weight** (kg)
					P ₁	P ₂				
100E-CP	PE 75/4	IE3	4	460 3~	8.2	7.5	13.8	1 750	10G1.5	170
	PE 105/4	IE3	2	460 3~	11.4	10.5	17.7	1 750	10G1.5	190
	PE 35/6	IE2	1, 3	460 3~	4.0	3.5	6.3	1 750	10G1.5	160
150G-CP	PE 90/6	IE3	1	460 3~	9.9	9.0	18.8	1 180	10G1.5	350

* P₁ = power at mains. P₂ = power at motor shaft. ** Includes 15 m cable. Data for alternative voltages available on request.

Standard and Options

Description	Standard	Option
Mains voltage	460 V 3~	220, 230, 380 V 3~*
Start-up	Direct on line (DOL)	Star delta (YΔ)
Cables	HO7RN8-F	EMC
Cable length [m]	10	20, 30, 40, 50
Mechanical seal (at medium side)	SiC-SiC-NBR	SiC-SiC-Viton
Mechanical seal (at motor side)	SiC-C-NBR (100E), SiC-SiC-NBR (150G)	-
O-rings (external seals)	NBR	Viton (not available for cable entry seal)
Protective coating	2k Epoxy 120 μm	2k Epoxy 400 μm

* Selected motors only. Contact Sulzer for details.

Monitoring

Description		Standard	Option
Motor (temperature)	Bi-metallic switch in windings	●	-
	PTC thermistor in windings	-	●*
Seals (leakage)	Moisture sensor (DI) in motor and seal chambers (XFP 100E)	●	-
	Moisture sensor (DI) in motor and oil chambers (XFP 150G)	●	-
	Moisture sensor (DI) in connection chamber (XFP 150G)	-	●

Temperature and leakage relays are required. See accessories table. * Must be selected when pump is operated via VFD.

Accessories

	Description	Size	XFP	Part no.		
Fixed installation - wet well with Sulzer Automatic Coupling System	Pedestal* (cast iron EN-GJL-250) 90° cast bend (single guide rail) - DIN flange connection	DN 100	100E	62320652		
		DN 150	150G	62320655		
	90° cast bend (single guide rail) - plug/clamp connection	DN 100 (pipe Ø109 mm)	100E	62320653		
		DN 100 (pipe Ø115 mm)	100E	62320654		
		DN 150 (pipe Ø160 mm)	150G	62320656		
	90° cast bend (twin guide rail) - DIN flange connection	DN 100	100E	62325026		
		DN 150	150G	62325027		
	Pedestal bracket fasteners single guide rail version (galvanised steel)		100E	62610633		
			150G	62610635		
	Pedestal bracket fasteners single guide rail version (stainless steel)		100E	62610637		
			150G	62610639		
	Pedestal bracket fasteners twin guide rail version (galvanised steel)		100E	62615054		
			150G	62615055		
Pedestal base anchor bolts single and twin guide rail (galvanised steel)		100E	62610775			
		150G	62610784			
Chain Kits (stainless steel) including shackle Working load limit (WLL) 320 kg	1.6 m	100E	310101395001 310101236003 310101236004 310101236006 310101236007			
	3.0 m					
	4.0 m					
	6.0 m					
	7.0 m					
	Working load limit (WLL) 400 kg			3.0 m	See pump 150G	310101236013 310101236014 310101236016 310101236017
				4.0 m		
6.0 m						
7.0 m						
Transportable	Ground support stand		100E	61355018		
			150G	61355025		
General	Cathodic protection (zinc anodes)		100E & 150G	13905000		
	Leakage relay type ABS CA 461	110 - 230 VAC 18 - 36 VDC, SELV	100E & 150G	16907010 16907011		
	Temperature and leakage relay type ABS CA 462	110 - 230 VAC 18 - 36 VDC, SELV	100E & 150G	16907006 16907007		

*Guide rail not included

www.sulzer.com

en (01.10.2020), Copyright © Sulzer Ltd 2020

This document does not provide a warranty or guarantee of any kind. Please contact us for a description of the warranties and guarantees offered with our products.

Directions for use and safety will be given separately. All information herein is subject to change without notice.