

Environmental Product Declaration - EPD

Environmental and economic life cycle performance including climate-related data

XFP PE1 Submersible Sewage Pump

The pump characterised in this EPD is inherently configurable. Configuration and efficiency depends on customer specification. The data given below are illustrative and only valid for the defined parameters (see chapter "Life cycle - coverage, assumptions, and exclusions").

Main applications:

Submersible pumps in the ABS EffeX PE1 to PE3 range provide reliable and economical pumping of clear water, polluted water, and heavily-polluted sewage containing solids, fecal slurry, and sludge in commercial and municipal applications. The model in this EPD is the XFP PE1 as a representative of the PE1 to PE3 range.

Type:

The pump characterised in this EPD is used in accordance with EN 120501 to pump wastewater and sewage from buildings and sites in private, commercial, industrial and municipal areas. The submersible pump is robust, reliable and of premium efficiency using motors from 1.3 to 22.0 kW.

Rated power:

3 kW

Manufacturer:

Sulzer Pumps Wexford, Ireland

CPC classification:

4322



Components included:




Pump including motor housing, bearing housing, volute, impeller, wear plate, stator, cable insulation, lifting hoop and other metallic components (e.g. stator windings, fasteners, bearings, washers & clips, lifting hoop, nameplates, transition piece).

Electricity mix considered for usage: Europe

Key economic and environmental advantages

- High availability of more than 98% (customers typically buy one standby pump in each service)
- Design life of the pump is 10 years
- High efficiency by means of improved hydraulic and mechanical performance lower energy consumption and hence lower emissions
- Variable frequency drives allow flexible performance and improved energy-efficiency
- Comprehensive training and professional service enable customers to operate the pump more reliably
- Retrofit service to re-establish the best efficiency point if operating conditions change
- Used materials are well suited for recycling.

Key economic and environmental indicators over life-cycle of 10 years

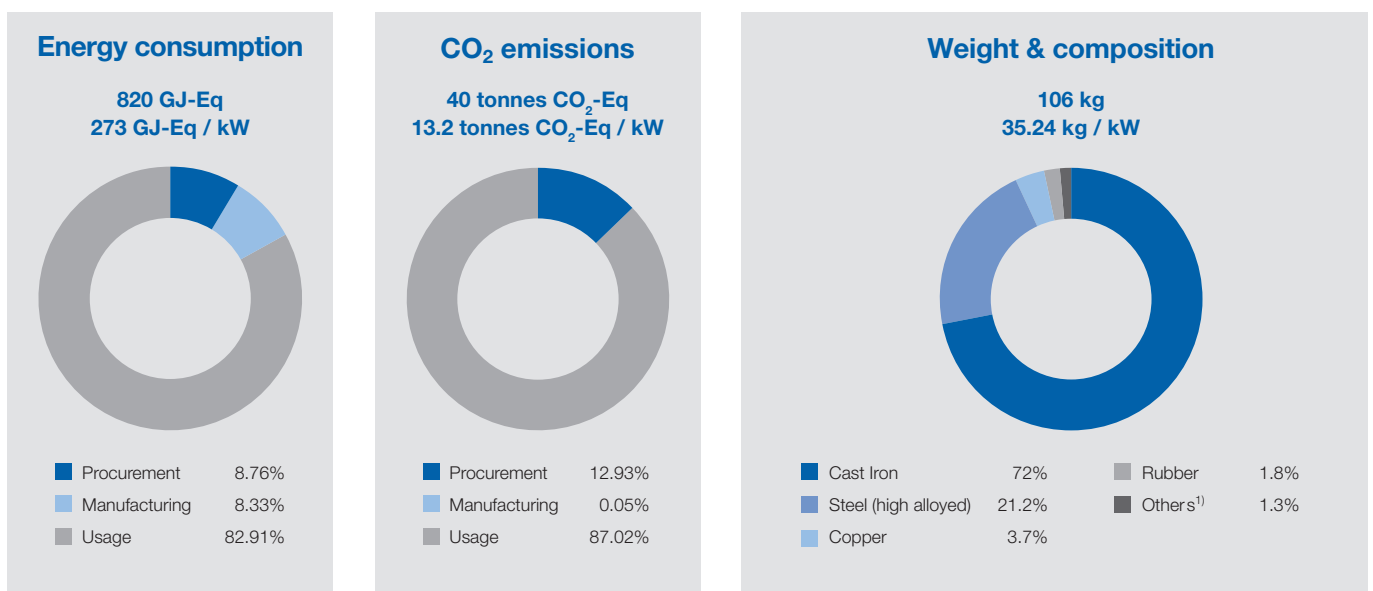

¹⁾ e.g. varnishes, seals, oils

Functional unit

The functional unit is defined as 1 kW hydraulic power of the pump at best efficiency point.

Composition of the product

Material	kg	% ¹⁾	kg / kW ²⁾
Cast iron	76.06	71.95%	25.35
Steel (high alloyed)	22.44	21.23%	7.48
Copper	3.96	3.75%	1.32
Rubber	1.90	1.80%	0.63
Oil	1.35	1.28%	0.45
Total	105.71	100.00%	35.23

The pump consists of 71.95% cast iron, 21.23% alloyed and high alloyed steels and 3.70% copper.

The indicated quantity of oil refers to the oil replaced when the pump is serviced, which is twice during the lifetime.

Remaining components such as paints and seals amount to less than 0.01% of the total weight and have as such been omitted.

Rounding has been used to simplify the results tables in the EPD.

¹⁾ By weight. ²⁾ Rated power.

Material consumption during life cycle per pump¹⁾ (material balance sheet)

Non-renewable resources	Procurement ²⁾		Manufacturing at Sulzer		Usage / end of life	
	kg	kg / kW	kg	kg / kW	kg	kg / kW
Steel (alloyed), casting and other materials			³⁾	³⁾		
for pump	109.00	36.33	105.00	35.00	105.00	35.00
for spare parts	4.00	1.33	0.00	0.00	0.00	0.00
Oil	4.00	1.33	4.00	1.33	4.00	1.33
Waste production (total)	n.a.	n.a.	10.00	3.33	109.00	36.33
Hazardous waste	n.a.	n.a.	0.00	0.00	4.00	1.33
Municipal waste	n.a.	n.a.	0.00	0.00	n.a.	n.a.
Recycling (total)	n.a.	n.a.	10.00	3.33	105.00	35.00
metals (pump)	n.a.	n.a.	4.00	0.00	105.00	35.00
metals (spare parts)	n.a.	n.a.	4.00	1.333	0.00	0.00
others	n.a.	n.a.	2.00	0.67	n.a.	n.a.
Renewable resources	kg	kg / kW	kg	kg / kW	kg	kg / kW
Wood (packaging)	4.00	1.33	0.00	1.33	0.00	0.00
Water consumption ⁴⁾	n.a.	n.a.	60.00	20.00	n.a.	n.a.

n.a.: not available, values per kW related to 3 kW rated power. ¹⁾ Material resources related to supply of energy to site are not considered. ²⁾ Covers all resources procured during the life cycle by Sulzer, including the oil used to operate the pump. ³⁾ Machining during the manufacturing produces recyclable waste of around 8% by mass of the metals bought in. ⁴⁾ In manufacturing: used for testing purposes.

Primary energy consumption during life cycle (primarily from usage / end of life)

	Procurement ²⁾		Manufacturing at Sulzer		Usage / end of life ³⁾		Total	
	GJ-Eq	GJ-Eq/kW	GJ-Eq	GJ-Eq/kW	GJ-Eq	GJ-Eq/kW	GJ-Eq/	GJ-Eq/kW
Electricity	71.6	23.880	0 ⁶⁾	0 ⁶⁾	677	226	749	250
Gases ¹⁾	1.0	0.3271	0 ⁶⁾	0 ⁶⁾	0	0	1.0	0.3271
Fuel oils	0.0	0.000	0 ⁶⁾	0 ⁶⁾	0	0	0.0	0.000
Fuels	n.a.	n.a.	0	0	0	0	0.0	n.a.
District heating ⁸⁾	n.a.	n.a.	0	0	0	0	0.0	n.a.
Materials	31	10.43	0	0	0	0	31	10.43
Transports	0.6	0.186	0.3	0.1100	41	13.59	42	13.884
Disposal, waste water	n.a.	n.a.	0.0	0.00115	-4 ⁷⁾	-1.380	-4 ⁹⁾	-1.379
Non-renewable energy sources ⁵⁾	103	34.449	0.3	0.1111	671	224	774	258
Total renewable energies ^{4) 5)}	3	0.885	0.0	0.00003	42	14	45	15
Total energy sources ⁵⁾	106	35.334	0.3	0.1111	713	238	819	273

Rounding has been used to simplify the results tables in the EPD. ¹⁾ Natural gas, butane, propane. ²⁾ Including transportation to Sulzer. ³⁾ Including transportation to customer. ⁴⁾ Hydro power, solar power, wind power, biomass. ⁵⁾ Including waste and waste water treatment. ⁶⁾ Fully allocated to procurement. ⁷⁾ Including credit from recycling of pump at end of life-time. ⁸⁾ Imported as heat. ⁹⁾ See p.3 of this EPD for more information.

Eq: equivalents, kW related to 3 kW rated power.

The pump is used in various locations; for the purposes of this EPD the European electricity factor has been applied.


Emissions during life cycle (primarily from usage / end of life)

	Procurement		Manufacturing at Sulzer		Usage / end of life ¹⁾		Total	
	t	kg / kW	t	kg / kW	t	kg / kW	t	kg / kW
Greenhouse Gas Potential (CO ₂ -equivalents)	5.1	1706.67	0.02	6.930	34	11 487	39	13 201
Acidification potential (SO _x -equivalents - AP)	0.2	56.956	0.00	0.003	1	206	1	263
Photosmog potential (ethylene equivalents)	<0.001	0.090	0.00	<0.001	0.00	0.62	0.00	0.71
Ozone depleting potential (CFC11-equivalents)	<0.001	<0.001	n.a ²⁾	n.a ²⁾	0.00	0.00	0.00	0.00
Biological Oxygen Demand (O ₂ -equivalents)	0.00	1.332	n.a ³⁾	n.a ³⁾	0.00	5.9	0.0	7.2

Rounding has been used to simplify the results tables in the EPD. n.a.: not available/applicable, kW related to 3 kW rated power. ¹⁾ Emissions are dominated by emissions in usage from electricity consumption. ²⁾ Ozone depleting substances are not in use at the manufacturing site. ³⁾ No related substances used in production.

Life-cycle – coverage, assumptions, and exclusions

System boundary: The EPD covers all relevant environmental aspects in relation to the life cycle phase diagram below.

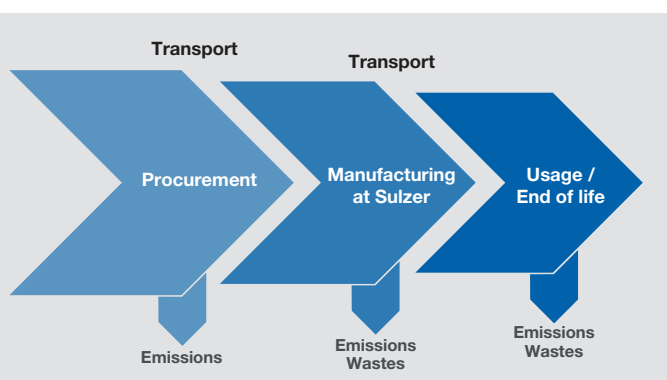

The construction of buildings, production machinery and transport infrastructure are all excluded.

As the motor is encased within the pump itself, this has been included in the EPD however the piping used to operate the pump is excluded from the functional unit.

Procurement includes the extraction of raw materials and production of semi-finished products, consumables, and energy by suppliers. Production data were converted into environmental effects via factors from the Ecolnvent Database; based on the component parts for this product as assembled by Sulzer.

The sourcing of both raw materials and external parts has been considered and together these account for over 99% of the product weight.

Due to low masses or rates of usage, small components such as solvents, varnishes and plastics (for e.g. seals) have not been included.

Manufacturing at Sulzer covers all product manufacturing activities undertaken at the manufacturing site including engineering, welding, grinding, machining, painting and assembly. Data used are drawn from the yearly Sulzer SEED data collection which includes energy (e.g. electricity, natural gas, butane, propane, fuel oils, district heating, coal and coke etc.) water consumptions and waste water, emissions to air and waste production. The energy used includes both manufacturing and on-site office activities. The emissions to air from the use of paints and solvents are included, however related consumption of the varnishes and paints are excluded. The environmental burden from waste and wastewater treatment has been calculated using factors from the Ecolnvent Database.

The pump is assembled in Ireland; therefore Ireland's emissions factor for the electricity generating mix has been applied for electricity used during manufacturing.

The packaging of the pump for transport to the customer is a cardboard carton on a shared pallet, which has been included.

Usage/End of Life includes the usage and servicing of the product. It also includes the production and disposal of spare parts and of oil.

The electricity consumption of the pump has been calculated assuming an efficiency of 95% for both the motor and frequency inverter.

Pump is used in Europe; the European electricity mix was therefore used.

18% of the total weight of the pump is typically replaced during the lifetime and includes bearings, seals, impeller, and wearing rings.

For recycling purposes, a credit of 50% of the initial materials burden to produce the pump has been assumed. This conservative assumption was based on the fact that the use of recycled steel saves between 47% and 65% of energy compared to virgin steel (Volkshausen 2003; Wuppertal-Institut 2008).

Spent oil is disposed as hazardous waste and incinerated accordingly; its environmental effects have been calculated based on factors from the Ecolnvent Database.

Transportation to Sulzer (depending on the location of the supplier, variously by truck, train, ship or airplane) is included in the procurement phase. Transportation to the customer following the manufacturing phase is by ship, truck and train, and transportation for service activities in usage is by van for service at the customer site, or by truck if the pump is serviced at Sulzer's site. Transportation of the dismantled pump at the end of its working life is not considered.

Allocation: For manufacturing, data collected on the annual consumption of energy and water, emissions to air, waste water and waste production (from SEED) have been divided by the total number of pumps produced by the site to estimate the resource consumption per pump. For procurement and usage all resources, emissions, and wastes have been fully allocated to the pump.

Referenced period for underlying data: Data taken from the Sulzer SEED database and Ecolnvent v.2 database, 2010.

Applied load levels of pump during life cycle

The applied load levels are summarized in the table below. Based on expected usage characteristics advised by customers, the pump is expected to be operated at full load throughout its life.

Phases of load level	Duration of phase	Operating hours per year	Efficiency η	Effective Rating
	years	hours / year	%	kW
Phase 1: full load	10	3 000	59%	2
Phase 2: middle load	0	0	0%	0
Phase 3: low load	0	0	0%	0

Rounding has been used to simplify the results tables in the EPD.

Glossary

Life cycle assessment, LCA is a management tool for appraising and quantifying the total environment impact of products or activities during the entire life cycle.

Life cycle costs are based on LCAs and cover the total costs of a product during the entire life cycle from the extraction of resources to the disposal of the product.

A **Functional Unit** is a concept that is used to compare the life cycle costs of different products on a like-for-like basis.

CPC (Central Product Classification) is a UN-based scheme for statistical division of product categories and service types.

EcolInvent Database contains international industrial life cycle inventory data.

Acidification occurs through deposition of soluble sulphur and nitrogen compounds from agricultural and combustion processes. Acidification can be harmful to sensitive ecosystems.

Eutrophication is the often anthropogenic enrichment of bodies of water by nitrates and phosphates. This increases the growth of aquatic plants that deoxygenate water and outcompete other aquatic life.

Global warming potential, GWP is the potency of 1 kg of a gas as a radiative forcing agent relative to an emission of 1 kg of carbon dioxide over 100 years.

Ozone depletion potential, ODPs are calculated as the change that would result from the emission of 1 kg of a substance compared to that from the emission of 1 kg of CFC-11 (trichlorofluoromethane).

Photochemical ozone creation potential, POCP refers to the change in of ground level ozone concentration potentially caused by the emission of 1 kg of a gas compared to that from the emission of 1 kg of ethene.

SEED is the database that Sulzer uses to collect, validate, and report on social, economic, and ecological data.

Sulzer Pumps

Sulzer Pumps is a world leader in reliable products and innovative pumping solutions. The global network of modern manufacturing and packaging facilities together with sales offices, service centres and representatives located close to major markets provide fast responses to customer needs.

Sulzer Pumps has a long history of providing innovative pumping solutions to business partners in the following industries: Oil and Gas, Hydrocarbon Processing, Pulp and Paper, Power Generation, General Industry, Chemical Process Industry, Water and Wastewater

All manufacturing sites operate business man-agements systems certified to ISO 9001, ISO 14001, and OHSAS 18001.

Sustainability program of Sulzer

Sustainability is a key factor for the success of Sulzer. The company is committed to creating long term economic value, while proactively assuming its social and environmental responsibility. Sulzer continuously assesses its sustainability activities. Extensive programs have been initiated to meet the expectations of Sulzer's stakeholders.

Applied standards and limitations

The document was prepared based on the EPD General Program Instructions, the PCR for pumps for liquids, liquid elevators and mixers (4322), and the ISO 14025:2010 standard. Environmental product declarations from different programs with different product category rules may not be comparable.

Verification

The EPD has been externally verified by Atkins Ltd, United Kingdom. The verification was undertaken in two sections; a review of the relevant documentation followed by a review of underlying data using a combination of a desk based review, a site visit and information exchange with Sulzer. This EPD has been verified against the updated PCR for Pumps for Liquids; Liquid Elevators and Mixers (CPC Class 4322), valid until 2016-02-22.

References

- Environmental labels and declarations – Type III environmental declarations – Principles, EN ISO 14025:2010, Berlin 2010
 - Product Category Rule (PCR), CPC Class 4322, Pumps for Liquids; Liquid Elevators and Mixers, PCR 2011:22, Version 1.0, 2011-12-05
 - Swiss Centre for Life Cycle Inventories, EcolInvent Database 2.1, St. Gallen, 2009
 - The International EPD Cooperation, EPD General Instructions for Environmental Product Declaration, EPD Version 1.0; 2008-02-29.
 - Volkshausen, W. (2003): Methodische Beschreibung und Bewertung der umweltgerechten Gestaltung von Stahlwerkstoffen und Stahlerzeugnissen, Dissertation, TU Freiberg
 - Wuppertal Institut für Klima, Umwelt Energie GmbH (2008): Stahl – ein Werkstoff mit Innovationspotenzial, Ergebnisse des ‚Zukunftsdialogs Rohstoffproduktivität und Ressourcenschonung‘, June 2008
- Further information about products of Sulzer Pumps can be found at: www.sulzerpumps.com/products

This and other EPDs are available online at:

www.sulzer.com/sustainability.

Further information about Sulzer: www.sulzer.com

Further information about the Sulzer sustainability program: www.sulzer.com/sustainability

Disclaimer

The EPD has been prepared to the best of Sulzer Ltd's knowledge. However, the data, figures and results are shown for illustration purposes only and Sulzer Ltd cannot assume any liability as to the quality of such data, figures and results. Any warranty or representation, whether express or implied, shall be excluded.

The EPD is published by Sulzer Ltd, Corporate QESH, 8401 Winterthur, Switzerland, © July 02, 2012. For questions and feedback please contact sustainability@sulzer.com.

This EPD is valid until: 22-02-2016

Date: 22-02-2013 **Version:** 0.1