### **SULZER**

Process pump type Ensival Moret EMTECH

EMTECH pump range has been designed for various process pumping applications. It fulfills energy efficiency regulations across all industries and exceeds the requirements of ISO 5199 international standard. Efficient hydraulics reduce total cost of ownership (TCO).

#### Main applications

The EMTECH process pump range has been designed to meet the process requirements in versatile general and industrial applications such as:

- clean and slightly contaminated liquids
- viscous liquids
- fibrous slurries
- sticky liquids

# EMTECH-R pump for specific applications

The EMTECH pump range with heating/cooling jacket offers also reliable and safest solutions for demanding applications such as:

• molten sulphur





- Construction in accordance with ISO 5199 and ISO 2858
- High efficiency hydraulics
- Low NPSH (net positive suction head)
- Back pull-out design: dismantling without disturbing piping or motor
- Open or closed impeller
- Shaft sealing with mechanical or hydrodynamical seal
- Collection chamber with drain for seal/process liquid in case of seal failure
- Easy and fast installation with standard coupling or V-belt drive
- Heating or cooling jacket as option
- Maximum interchangeability of parts throughout the range

- High efficiency
- Low NPSH
- Minimized total cost of ownership (TCO)




## Materials

Standard material options	Material
Duplex stainless steel	A890 CD4MCuN
Super austenitic	A743 CN7M
Cast iron	A48 class 35B

## Operating data

	50 Hz	60 Hz
Capacities	up to 350 m³/h	up to 1'540 USgpm
Heads	up to 160 m	up to 525 ft.
Pressures	up to 20 bar	up to 290 psi
Temperatures	up to 180°C	up to 356°F
Maximum speed of rotation	up to 3'000 rpm	up to 3'600 rpm

## Performance range

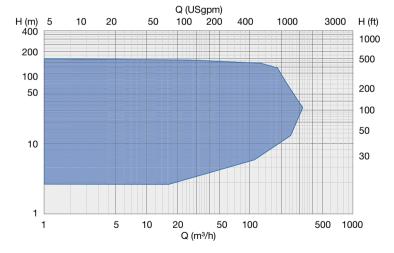







Hydrocarbon processing



Power generation



Pulp, paper and board



General industry



Chemical process industry



Water and wastewater