

Submersible Mixer Type ABS RW 480

The submersible mixer RW 480 is specifically designed for the major mixing functions during the homogenization of sludge and slurry.

Construction

The submersible mixer is designed as a compact, water-pressure-tight unit including propeller and integrally casted installation bracket for attachment to the square guide tube. The mixers are available in cast iron version with stainless steel propeller.

Maximum allowable temperature of the medium for continuous operation is 40 °C.

Motor

Squirrel cage, 3-phase, 4-pole, 50 Hz, insulation class F, max. submergence 20 m.

Propeller

The mixer is equipped with a special 2-blade propeller. With this propeller a very strong rotating turbulent flow is produced in radial and axial direction. Therefore this propeller combines all properties for the homogenization of sewage sludge which belongs to the intrinsic viscous substances.

Solids deflection ring

The solids deflection ring protects the mechanical seal from damage by ingress of solid or fibrous matter.

Bearings

All bearings are lubricated-for-life and maintenance-free, with a calculated lifetime of more than 100 000h.

Gearbox

High-efficiency planetary gearbox, fatigue strength with a calculated lifetime of more than 100 000 h.

Shaft sealing

Mechanical seal: Silicon carbide / Silicon carbide.
O-Rings / lip seals: NBR.

Seal monitoring

DI-system with leakage sensors in the oil, motor, and cable connection chambers.

Temperature monitoring

Thermal sensors in the stator which open at 140 °C.

Cable

10 m sewage resistant material.
Optional lengths (m): 15, 20, 30, 40, 50.

Options


Explosion-proof version, seals in viton, shielded cable, PTC or PT 100 in the stator.

Accessories

Lifting hoop, vibration damper.

Weight

163 kg (A 75/4), 169 kg (A110/4).

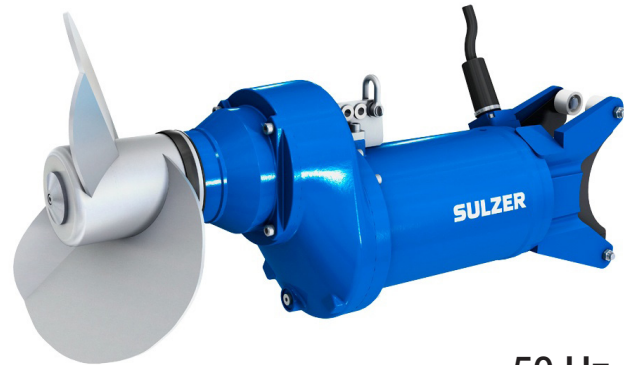

50 Hz

Features

- Highly efficient submersible mixer for the homogenisation of high concentrated sewage sludge.
- Reduced energy cost due to a unique drive unit design, including a high efficiency gear box.
- No risk to motor overloading due to high or varying dry matter content.
- Reduced mixing times.
- Blockage-free, 2-blade propeller reduces LCC.

Materials

Part	EC (cast iron)
Motor housing	EN-GJL-250
Sliding bracket	EN-GJS-400-18 painted / polyamide (CF-8M)
Motor shaft / Propeller shaft	1.4021 / 1.4418
Propeller	1.4571 (AISI 316Ti)
Fasteners	1.4401 (AISI 316)

Motor Data

Motor	A 75/4	A 110/4
Rated power (kW)	7.5	11.0
Rated current at 400 V (A)	14.8	21.8
Speed (r/min)	446 - 493	517 - 539
Motor efficiency (%)	86.9	84.9
Power factor	0.84	0.86

Mixer performance table

Hydraulic No.	Mixer power P_p in kW	Motor kW
4811	4.8	7.5
4812	5.9	7.5
4813	6.5	7.5
4814	7.0	11.0
4815	8.8	11.0

[sulzer.com](https://www.sulzer.com)

Submersible Mixer Type ABS RW 480 50Hz en 07.2025, Copyright © Sulzer Ltd 2025

This document does not provide a warranty or guarantee of any kind. Please contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.