


## Sulzer ejector for priming Size S

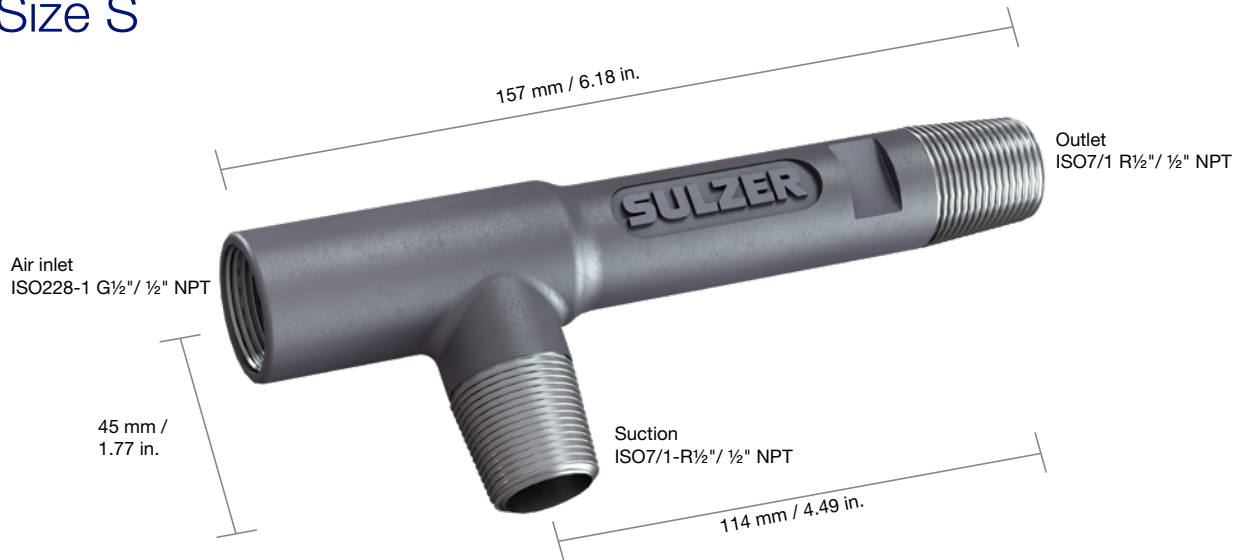

	CE version	US version
Air inlet connection	ISO 228-1 G1/2"	1/2" NPT
Suction connection	ISO 7/1 R1/2"	1/2" NPT
Outlet connection	ISO 7/1 R1/2"	1/2" NPT
Max. working temperature	90°C	194°F
Air inlet feed pressure	4 to 6 bar	58 to 87 psi
Air consumption	330 NI/min (6 bar)	12.4 SCFM (87 psi)
Priming capacity	up to 4.4 l/sec	up to 70 USgpm
Suction head	up to 8 m (6 bar)	up to 26.5 ft. (87 psi)

### Materials

Ejector frame (757)	ASTM A890 Grade 3A, duplex steel
Ejector nozzle (716)	ASTM A890 Grade 3A, duplex steel
Set screw (904)	A4L-21H, ISO 3506-3
O-ring (412)	NBR70, ISO 3601-1

[sulzer.com](http://sulzer.com)