

Submersible Drainage Center-line Pump XJC 50




Specification

Electric submersible pump.
 Maximum submergence: 65 ft. Protection class IP 68.
 Max temperature of pumped medium at max power input and continuous duty 104 °F.
 Max medium density 0.0397 lbs/inch³. pH of the pumped medium 5-8.
 Strainer hole: 5/16" x 7/8". Max number of starts 30/hour.

| | |
|----------------------|----------------------|
| XJC 50 ND | Medium head, 3-phase |
| XJC 50 ND AT* | Medium head, 3-phase |
| XJC 50 LD | High flow, 3-phase |
| XJC 50 LD AT* | High flow, 3-phase |
| XJC 50 HD | High head, 3-phase |
| XJC 50 HD AT* | High head, 3-phase |

*AquaTronic: Built-in electronic pump control.

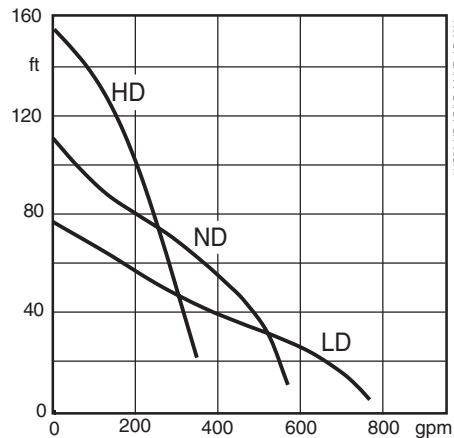

Electric Motor

3-phase squirrel-cage induction motor, 60 Hz.
 Service factor 1.1. Class F insulation.
 Dual voltage stator 230/460 V (single voltage contactor coil).***
 Motor rating P₂: 9 Hp. 2 pol. Speed: 3520 rpm.
 η: 90.1 (50 %), 91.1 (75 %), 90.2 (100 % load)

***For pumps with built in contactor.

| Voltage, V | 230 | 460 | 575 |
|--------------------|------|------|-----|
| Nominal current, A | 22.4 | 11.2 | 9.0 |

Starting Method and Motor Protection

XJC 50 AT: Direct on line start (DOL 575 V) with built in AquaTronic unit, which automatically adjusts phase order by dual contactors, ensuring correct motor rotation.
 Soft start is built in with the AquaTronic unit at 230-460 V, where three thyristors reduces start current to three times the nominal current. Here two relays ensures correct motor rotation.
 The AquaTronic unit monitors motor temperature, by use of NTC thermistors built into stator windings, and stops the motor at high temperature. It will also stop the motor at high amperage or if a phase is missing.


XJC 50: Direct on line start with built in contactor. Pumps to be used with VFD must have terminal block instead of contactor.
 Thermal switches (284 °F, ±5) built into the stator windings are connected to the contactor and stops the pump at high temperature.

Power Cable

Heavy duty power cable for submersible pump applications.
 65 ft AWG 8/4 W (UL, CSA, MSHA) 208, 230 V
 65 ft AWG 14/4 SOOW (UL, CSA, MSHA) 460, 575 V

Shaft Seal

Double mechanical seal in oil bath.
 Primary seal: Silicon carbide on silicon carbide.
 Secondary seal: Silicon carbide on carbon.

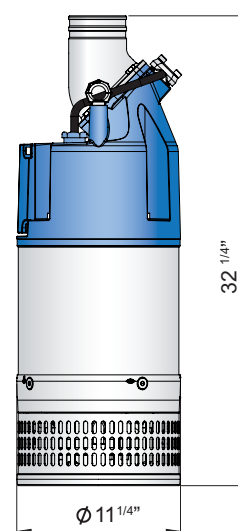

Bearings

Upper bearing: Single-row deep groove ball bearing.
 Lower bearing: Double angular contact ball bearing.

Discharge Connections

3", 4", 6" hose connections.
 3" (standard HD), 4" (standard ND), 6" (standard LD)
 NPT threaded connections.

Weight

130 lbs (without cable)

Options and Accessories

AquaTronic control panel. Level sensor. Service data kit. Zinc anodes.
 Surface protection coating. Series connection.
 Discharge connection accessories and hose.

Pump control

| Features | XJC 50 | XJC 50 AT | | | | Service Data Kit Read out |
|--------------------------------------------------|--------|-----------|-------------------|-------------------------------|----------------------------------------------|---------------------------|
| | | AT | AT + Level Sensor | AT + AquaTronic Control Panel | AT + AquaTronic Control Panel + Level Sensor | |
| Run mode | X | X | X | X | X | |
| Integrated start equipment | X | X | X | X | X | |
| Automatic direction of rotation | | X | X | X | X | |
| Motor protection high temp | X | X | X | X | X | X |
| Motor protection high amp | | X | X | X | X | X |
| Protection against missing phase | | X | X | X | X | X |
| Level control | | | X | | X | |
| Dry run protection | | | X | | X | |
| Automatic restarting | | | X | | X | |
| Stop mode | | | | X | X | |
| E-mode (Automatic stop/run) | | | | | X | |
| Indication of water in oil | | | | X | X | X |
| Indication of low motor insulation | | | | X | X | X |
| Indication of high or low voltage | | | | XX | XX | X |
| Indication of high temperature | | | | XX | XX | X |
| Indication of high amp | | | | XX | XX | X |
| Indication of phase unbalance | | | | XX | XX | X |
| USB cable connection | | X | X | X | X | X |
| Crash log (10 latest) | | | | | | X |
| Documentation (spare part list, workshop manual) | | | | | | X |

XX = Fault indication when pump is automatically stopped to protect the motor.

Materials

| Description | Material | EN | ASTM |
|----------------------|--------------------------------|-------------------------------|-------------------------|
| Castings | Aluminium | EN 1706:AC-43100 | ASTM AISi10mg |
| Strainer / Jacket | Stainless steel | 10088:X5CrNi18-10 (1.4301) | AISI 304 |
| Rotor shaft | Stainless steel | 10088:X20Cr13 (1.4021) | AISI 420 |
| Impeller / Wear ring | High-chrome alloy | EN-GJN-HV600(XCr23) | ASTM A 532: Alloy III A |
| Fasteners | Stainless steel | 10088:X5CrNiMo 17122 (1.4401) | AISI 316 |
| Wear parts / O-rings | Nitrile rubber | | |
| Coating | 2 component epoxy paint 120 µm | | |