

Flow Booster Type ABS SB 1600 to 2500

The compact flow boosters type ABS SB have been designed for a wide range of applications. The units are suitable to achieve flow pattern in large tanks and open waters for mixing and stirring applications.

Construction

The flow booster type ABS SB is designed as a compact, water pressure-tight unit including propeller and integrally lockable coupling system. The flow boosters are available in the material version: Cast iron (EC). Maximum allowable temperature of the medium for continuous operation is 40 °C (104 °F).

Motor

Squirrel cage, 3-phase, 4-pole, 60 Hz, insulation Class F (155 °C / 311 °F), max. submergence 20 m (66 ft).

Propeller

Technically optimized, axially operating 2-blade propellers with very good self-cleaning effect for vibration-free operation. The propellers are designed to achieve high thrusts and therefore a high flow capacity in axial direction.

Solids deflection ring

The solids deflection ring protects the mechanical seal from damage by ingress of solids or fibrous matter.

Bearings

All bearings are lubricated-for-life and maintenance-free, with a calculated lifetime of more than 100 000 h

Gearbox

Robust fatigue strength gearbox of high efficiency and very long operating life, oil lubricated.

Shaft sealing

Motor side dual radial seal, medium side silicon carbide mechanical seal independent of direction of rotation. O-Rings / lip seals: NBR.

Seal monitoring

DI-system with a sensor in the junction box.

Temperature monitoring

Thermal sensors in the stator which open at 140 °C (284 °F).

Cable

10 m sewage resistant material.
Optional lengths: 15 m (49 ft), 20 m (66 ft), 25 m (82 ft), 30 m (98 ft).

Options

Explosion-proof version, seals in viton, EMC cable, PTC in the stator, double mechanical seal, insulation Class H.



60 Hz

Weight

SB	Weight (kg)
1600, 1800, 2000	161 kg
2200, 2500	170 kg

Materials

Part	Material
Motor housing	EN-GJS-400-18/ASTM A536, 60-40-18
Motor shaft	1.0060 / ASTM / AISI A276 Gr. 65
Propeller shaft	1.7225 fully encapsulated (42CrMo4)
Propeller shaft (double mech. seal)	1.4418
Propeller	Reinforced solid PUR
Coupling bracket	DIN 17 445; 1.4408/ASTM/AISI CF-8M
Fasteners	1.4401 / ASTM / AISI 316

Motor data

Motor	A 16/4	A 35/4	A 46/4
Rated power (kW/hp)	1.6 / 2.1	3.5 / 4.7	4.6 / 6.2
Rated current at 460 V (A)	3.0	6.5	8.7
Motor efficiency (%)	78.3	81.4	80.7
Power factor	0.87	0.83	0.82
Speed (rpm)	35 - 45	40 - 59	53 - 59

Flow booster performance table

Hydraulic No.	Propeller dia. in mm / in	Mixer power P _p in kW / hp	Motor kW / hp
1621	1600 / 63	0.9 / 1.2	1.6 / 2.1
1622	1600 / 63	1.6 / 2.1	3.5 / 4.7
1623	1600 / 63	2.0 / 2.7	3.5 / 4.7
1624	1600 / 63	1.0 / 1.3	1.6 / 2.1
1625	1600 / 63	1.3 / 1.7	1.6 / 2.1
1821	1800 / 71	1.6 / 2.1	3.5 / 4.7
1822	1800 / 71	2.2 / 3.0	3.5 / 4.7
1823	1800 / 71	2.8 / 3.8	3.5 / 4.7
1824	1800 / 71	1.1 / 1.5	1.6 / 2.1
1825	1800 / 71	1.4 / 1.9	1.6 / 2.1
2021	2000 / 79	1.6 / 2.1	3.5 / 4.7
2022	2000 / 79	1.9 / 2.5	3.5 / 4.7
2023	2000 / 79	2.6 / 3.5	3.5 / 4.7
2024	2000 / 79	3.2 / 4.3	3.5 / 4.7
2025	2000 / 79	1.1 / 1.3	1.6 / 2.1
2026	2000 / 79	1.5 / 2.0	1.6 / 2.1
2221	2200 / 87	1.9 / 2.5	3.5 / 4.7
2222	2200 / 87	2.2 / 3.0	3.5 / 4.7
2223	2200 / 87	3.2 / 4.3	3.5 / 4.7
2224	2200 / 87	4.1 / 5.5	4.6 / 6.2
2521	2500 / 98	1.3 / 1.7	1.6 / 2.1
2522	2500 / 98	1.9 / 2.5	3.5 / 4.7
2523	2500 / 98	2.4 / 3.2	3.5 / 4.7
2524	2500 / 98	2.8 / 3.8	3.5 / 4.7
2525	2500 / 98	3.8 / 5.1	4.6 / 6.2

Optimizing special design

Sulzer has relied on the well-established special design for the propellers, giving a self-cleaning effect. An advanced special design was combined with propeller blades shaped for optimal flow properties. These properties make the propeller insensitive to turbulence or uneven flow.

The propeller design guarantees an optimum effectiveness not only at specifically chosen performance levels, but throughout the power and diameter range. Due to the new manufacturing method of large propellers, which allows the propeller production in one piece, an optimum stress pattern in the propeller and the best possible precision is achieved. This allows vibration-free operation.

New coupling system


The ABS coupling system for submersible mixers is a major technical innovation in the development of easy disconnection systems. Liquid flow, regardless of being laminar or turbulent, causes vibrations which effects submersible mixers especially with large propellers. In addition to impulse forces and any intrinsic vibrations of the units themselves, these forces must be absorbed by the coupling device so that quick disconnection systems can function in a secure and reliable manner.

A vibration-free attachment is a major requirement for reliable running and long operating life of the mixers and installation system. Amply designed three dimensional support of the coupling element ensure its reliable seating. With the new flow booster type ABS SB an innovative product assuring trouble-free operation is offered.

Innovative concrete base


The ABS concrete base finally establishes the necessary vibration absorbing connection between machine and built structures. This invention has an abundance of advantages that make the flow booster a really comprehensive solution:

- The flow favouring drop shape avoids turbulence and therefore improves the efficiency of the propeller.
- The mass and the material characteristics suppress all damaging vibrations.
- Corrosion resistance and a fluent connection with the tank floor ensure the highest level of security and long operation life.

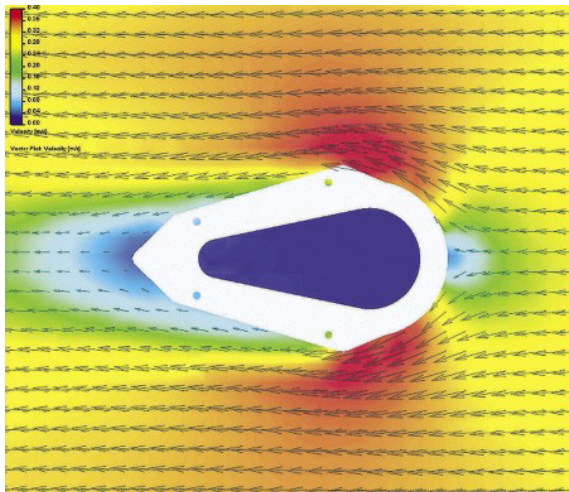


Computational fluid dynamics

Functioning

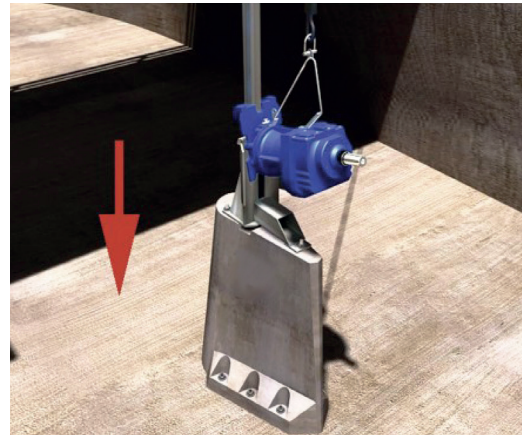

Lowering

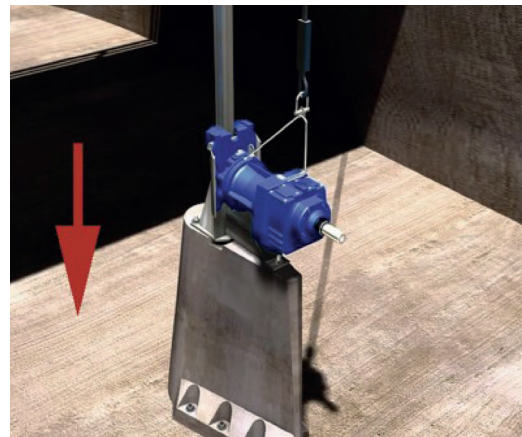

Coupling



Locking (inside view)

sulzer.com

Flow Booster Type ABS SB 1600 to 2500 60Hz en 07.2025,
Copyright © Sulzer Ltd 2025

This document does not provide a warranty or guarantee of any kind. Please contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.